

# eTOWER RANGE


## Range Overview Specification Sheet

The following specifications pertain to the Freedom Won eTower modular stackable LiFePO4 battery, designed for smaller residential and light commercial applications with options of 1, 2, 3, 4, 5 or 6 modules in a tower per system.



	1 x e5000	2 x e5000	3 x e5000	4 x e5000	5 x e5000	6 x e5000
<b>Total Energy Capacity [kWh]</b>	5	10	15	20	25	30
<b>Energy, 80% DoD [kWh]<sup>1</sup></b>	4	8	12	16	20	24
<b>Energy, 90% DoD [kWh]<sup>1</sup></b>	4.5	9	13.5	18	22.5	27
<b>Current Capacity [Ah]</b>	100	200	300	400	500	600
<b>Max/Cont. Charge Current [A]<sup>2</sup></b>	80/70	144/126	216/189	288/252	360/315	432/378
<b>Max/Cont. Charge Power [kW]<sup>2</sup></b>	4.2/3.6	7.5/6.6	11.2/9.8	15/13.1	18.7/16.3	22.5/19.7
<b>Max/Cont. Discharge Current [A]<sup>2</sup></b>	100/90	180/160	270/240	360/320	450/400	540/480
<b>Max/Cont. Discharge Power [kW]<sup>2</sup></b>	5.2/4.7	9.4/8.4	14/12.6	18.7/16.8	23.4/21	28/25.2
<b>Max Recommended Inverter Total Rated Power (cont.) [kVA]</b>	5	10	15	20	25	30
<b>Nominal Voltage [V]</b>	52V, to suit 48V Inverters, min 47V, max 56V. *Do not connect modules in series (for high voltage batteries, refer to Freedom Won LiTE HV ranges).					
<b>Dimensions when e5000 placed horizontally: H x W x D [mm] (Front to rear)</b>	Single unit with pedestal: 247x460x463	2 module tower with pedestals: 479x460x463	3 module tower with pedestals: 711x460x463	4 module tower with pedestals: 943x460x463	5 module tower with pedestals: 1190x460x463	6 module tower with pedestals: 1437x460x463
<b>Dimensions (excluding busbars on front) [mm]</b>	Single unit without pedestal: 222x440x443					
<b>Module Height equates to 5U (U = standard 19" rack unit) [mm]</b>	247	479	711	943	1190	1437
<b>Crated Dimensions - H x W x D [mm]</b>	TBC	TBC	TBC	TBC	TBC	TBC
<b>Combined Weight [kg]</b>	45	90	135	180	225	270
<b>Crated Weight [kg]</b>	TBC	TBC	TBC	TBC	TBC	TBC

**Installation Method**  
Stacked horizontally onto each other to form a tower with pedestals included, (one per module) or 19" rack mounted with brackets (cabinet excluded). Vertical mounting on floor or wall (shelf/bracket) with terminals facing upwards also acceptable. Generally up to 4 x e5000's per system (for larger capacity requirements, see Freedom Won LiTE ranges).

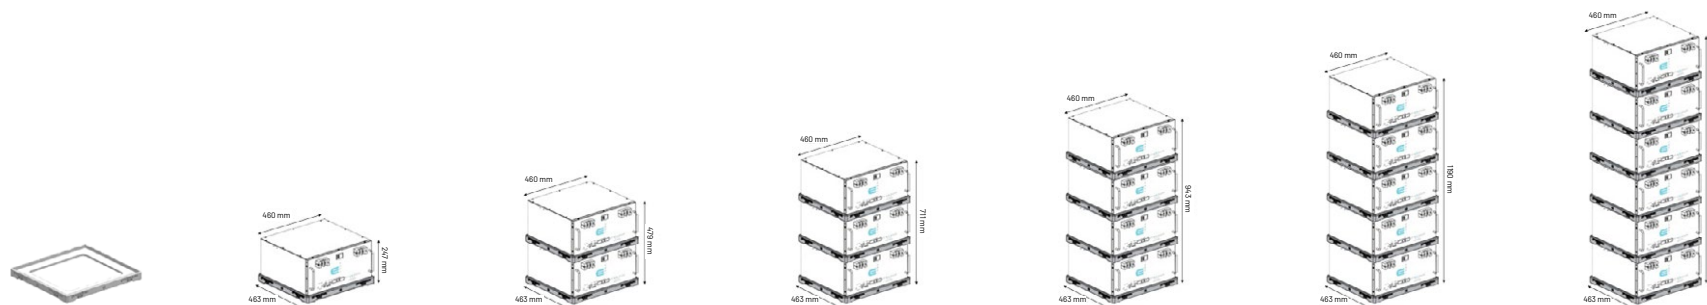

DC Leads to Inverter or DC Bus per positive & negative connection - minimum cable size [mm <sup>2</sup> ] *cables included - see included accessories	1 x 35	1 x 35	2 x 35	2 x 35	3 x 35	3 x 35

**DISTRIBUTORS AND RESELLERS** Contact your nearest Accredited Freedom Won Distributor or Reseller Installer for further sales and technical support.

Plug into The Current Future

[www.freedomwon.co.za](http://www.freedomwon.co.za)

# eTOWER RANGE

## Range Overview Specification Sheet

freedom  
WON



1 x e5000



2 x e5000



3 x e5000



4 x e5000



5 x e5000



6 x e5000

<b>Enclosure</b>	Steel – painted white, rated for indoor use only, out of direct sun and away from other heat sources.
<b>DC Connection - Integrated Terminals on Front</b>	2 x M6 bolts each for positive and for negative terminals for DC leads to inverter and busbars for connection of parallel e5000's in tower or rack configuration.
<b>Tower Interconnecting Busbars - minimum cross section area [mm<sup>2</sup>] *busbars included - see included accessories</b>	70 (17mm x 4mm busbar available in accessories) *Note that the Freedom Won busbar accessories are designed for the pedestal tower dimensions, not for 19" rack mounting, which has different spacing.
<b>Communication and Control Interfaces (See manual for further details)</b>	<ul style="list-style-type: none"> <li>CAN Bus (RJ45 Socket x 1) - for interfacing with compatible inverters and system controllers (the eTower is fully compatible with all common CAN bus compatible brands).</li> <li>RS485 (RJ45 Socket x 1) - for interfacing with the Voltronics Axpert range of inverters equipped with a RS485 lithium battery interface and the applicable firmware.</li> <li>RS232 (RJ45 Socket x 1) - for interfacing with a PC for firmware and setting updates (only by Freedom Won technicians).</li> <li>RS485 (RJ45 x 2) - for the communication connection of parallel batteries up to four in tower.</li> <li>Digital Outputs x 2 - for controlling external relays based on pre-set functions.</li> </ul>
<b>Protection</b>	Internal electronic protection including overcurrent, cell under and over voltage, temperature out of range, weak cell detection, minimum SOC control, active voltage based charge current limiting. *DO NOT short circuit or connect in reverse polarity.
<b>Human Interface</b>	<ul style="list-style-type: none"> <li>State of Charge Display (0 to 100% indicated by six green LED's)</li> <li>Alarm LED (red)</li> <li>Run LED (green)</li> <li>On LED (green)</li> <li>BMS Reset Button</li> <li>Main On/Off Switch</li> <li>Serial RS232 plug for programming via PC (by Freedom Won only)</li> <li>Dip Switch block for selecting module addresses</li> </ul>
<b>Warranty <sup>3</sup></b>	10 years limited warranty
<b>Service Life <sup>4</sup></b>	>15 years
<b>Included Accessories</b>	<ul style="list-style-type: none"> <li>Plastic pedestal for tower stacking (cleats for 19" rack not included but available from Freedom Won if required).</li> <li>DC cables standard 1,8m long in 35mm<sup>2</sup> single core with M6 terminal lugs on one end, red for positive and black for negative.</li> <li>Interconnecting tower busbars drilled and cut to length for single tier jumps using tower pedestals, with heat shrink covering, red for positive and black for negative.</li> <li>Interconnecting RS485 parallel battery communication cables for interconnecting the tower modules' communication RJ45 sockets (standard ethernet cables may also be used).</li> <li>Inverter interface CAN Bus cable at 1.8m length for connecting compatible CAN bus equipped Victron inverters.</li> <li>Inverter interface CAN Bus cable at 1.8m length for connecting compatible CAN bus equipped Type 1 inverters. e.g. Sunsynk, Growatt, Solis, Goodwe (see Freedom Won Interfacing Guide for full details).</li> <li>Inverter interface RS485 cable at 1.8m length for connecting Voltronic/Axpert Inverters.</li> </ul>
<b>Packaging</b>	One e5000 per cardboard box complete with above included accessories
<b>Certificate of Compliance</b>	UN 38.3 / IEC 62619

### Notes to Specification Sheet

1. DoD = Depth of Discharge, max recommended 90% DoD, recommended 80% DoD for average daily discharge, 70% DoD on average for optimal life. Max permissible DoD is 100%.
2. Max discharge and charge (current and power) duration – 5 minutes per 30-minute cycle.
3. Refer to eTower warranty document for further details.
4. Assumed moderate cycling and ideal conditions of temperature, charge and discharge rates, and depth of discharge per cycle.

DISTRIBUTORS AND RESELLERS

Contact your nearest Accredited Freedom Won Distributor or Reseller Installer for further sales and technical support.

Plug into The Current Future

[www.freedomwon.co.za](http://www.freedomwon.co.za)