



DUR-A-FLEX

Resinous Flooring
Systems



DUR-A-FLEX
INNOVATION FROM THE FLOOR UP



CRYL-A-FLEX MMA FLOORING SYSTEMS

From primer coat to topcoat, the Cryl-A-Flex family of Methyl Methacrylate (MMA) floor systems offer a complete solution for a wide range of applications. Our experience has led to the development of products that meet our customers' needs from heavy manufacturing to decorative, commercial environments. The ultra-fast Cryl-A-Flex cure sets new standards for performance and operational flexibility with complete systems installed as quickly as one day.

With an antimicrobial additive or a chemical and thermal resistant topcoat, Cryl-A-Flex products meet your most demanding flooring requirements.

Offering excellent resistance to acids and alkali, Cryl-A-Flex systems are UV stable and cure to an attractive, low-glare satin finish.

PRINCIPLE CRYL-A-FLEX COMPONENTS INCLUDE:

PRIMER COAT

Cryl-A-Prime P-101 penetrating low viscosity primer

BODY COAT

Cryl-A-Glaze G-201 medium viscosity binder

AGGREGATES

- Decorative chip blends
- SL filler blend
- Natural quartz aggregate
- Multi-colored quartz aggregate is available in two grades: Q28 (fine) and Q11 (coarse)

TOPCOATS


Cryl-A-Top T-301/T-303 topcoats are available to handle various degrees of chemical and thermal shock resistance.

CRYL-A-CHIP


This decorative system consists of multicolored chips broadcast into acrylic resin for a textured look. System components: Cryl-A-Prime, Cryl-A-Glaze, decorative chips and Cryl-A-Top topcoat. Chips are available in Macro and Micro sizes. For a self leveling overlay systems specify Cryl-A-Chip SL.



CA 01350
COMPLIANT



Q-28



Q-11



MICRO



MACRO



STANDARD



COARSE

CRYL-A-SHIELD

This clear, two-component, high build system for sealing concrete or quarry tile consists of a Cryl-A-Prime low viscosity primer coat, which penetrates and strengthens concrete paired with a Cryl-A-Top topcoat that is available with or without slip resistant textures.

CRYL-A-FLOOR

This workhorse resurfacer combines pigmented MMA resin and natural quartz aggregate for applications 1/8" to 1/4" thick. Available in a variety of solid colors, Cryl-A-Floor can be further enhanced with an antimicrobial treatment, which actively attacks bacteria and fungi and prevents microorganisms from synthesizing chemicals, which would damage flooring. For a self leveling overlay systems specify Cryl-A-Floor SL.

CRYL-A-QUARTZ

This premium decorative flooring solution uses the select graded, multi-color quartz aggregate that has established Dur-A-Flex® as a premier provider of pigmented quartz to the commercial, industrial, and institutional flooring industries. Cryl-A-Quartz delivers a rich selection of colors and a choice of slip resistant or smooth textures. Available in two grades: Q28 (fine) and Q11 (coarse). For a self leveling overlay system specify Cryl-A-Quartz SL.

CRYL-A-TEX

This MMA polymer concrete matrix can be used for pothole and spall repair or used for sloping for drains and structural rehabilitation. It consists of Cryl-A-Tex liquid and powder and cures to full strength in one hour.

CRYL-A-STAT ESD-401

This electrostatic dissipative floor sealer is used over standard MMA floor systems offering a quick, one-hour cure. Excellent UV resistance provides consistent color stability.

MICA-FLEX M

A decorative floor system composed of 100% reactive, fast curing, high strength methyl methacrylate (MMA), natural mica flakes and MMA topcoats. Mica flakes are available in both micro and macro sizes.



DUR-A-FLEX®
INNOVATION FROM THE FLOOR UP

Standard Colors



Mica-Flake




All mica samples shown contain metallic flakes. Available in macro and micro sizes.


Micro Chip Blends




Macro Chip Blends

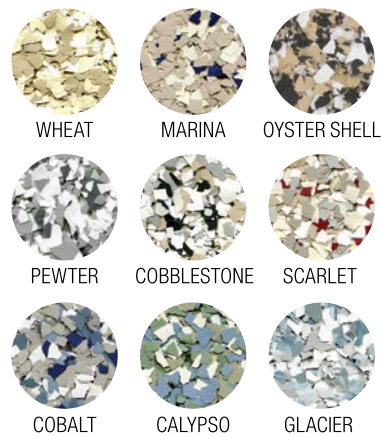

Quartz Blends - Q11

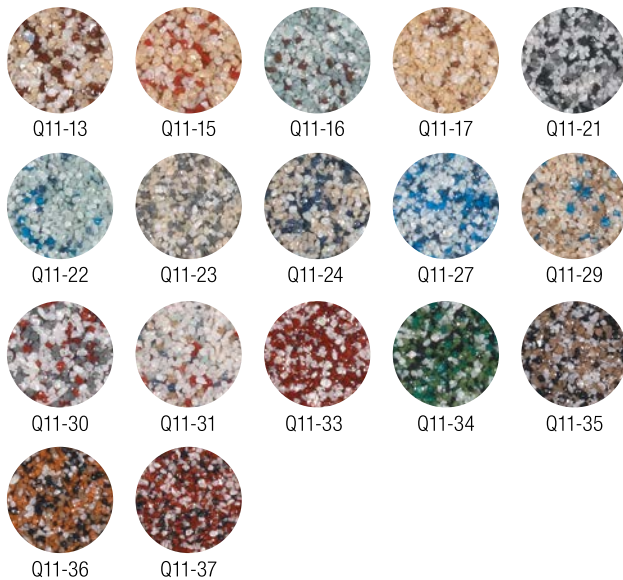

Quartz Blends - Q28

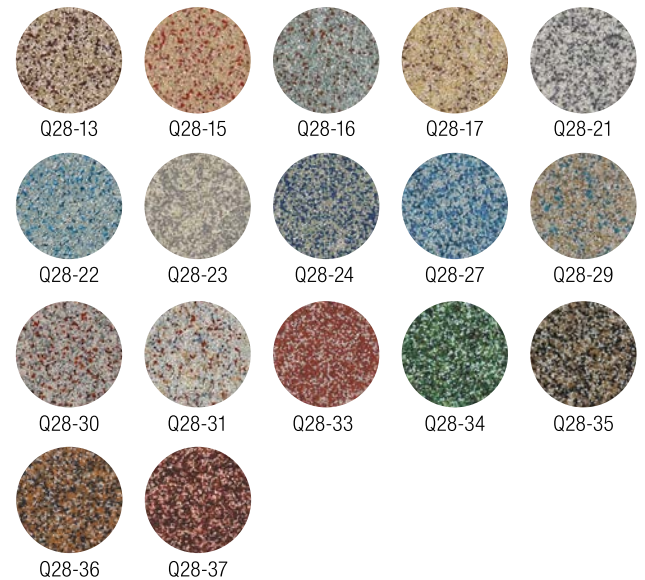

The samples shown are only close approximations and should not be used for specification purposes.
Contact Dur-A-Flex to obtain actual samples for best color selection.