














No.	Picture	Model	Features	Compatible devices
			<p><b>New Series L8 Mesh system</b></p> <p>Separate catalog*</p>	
<b>Multi-functional Smart home gateway (Smart life APP/Tuya APP)</b>				
1	<p><b>NEW</b></p>  <p>Smart handheld touch screen gateway</p>	GS-Z1	<p><b>Z1 is a tuya handheld smart screen gateway, It can be held in hand and operated, and the flexible configuration mode can meet the needs of users in more smart home scenarios.</b></p> <ul style="list-style-type: none"> <li>- 5 Kinds of devices control</li> <li>- One- click scene linkage, supports IR, Wi-Fi, Zigbee, Bluetooth and RF devices control.</li> <li>- Real-time scene synchronization</li> <li>- Support IR learning</li> <li>- Touch screen and key control</li> </ul>	
2	<p><b>TOP SELLING</b></p>  <p>8-Inch full touch screen smart home gateway</p>	GS-F8-ZCH (2-way wired ceiling speakers + 2-gang relay switch) -- <b>Speakers not in the box</b>	<p><b>F8 is a tuya smart home gateway with 8 inch touch screen, Android operation system, supports music playback.</b></p> <p>Key features: It comes with WiFi and Lan connection, ZigBee 3.0, added 100 sub-devices</p> <ul style="list-style-type: none"> <li>*Local control and local smart scene</li> <li>*Customize your home scene, one tap to run.</li> <li>*Can support wired and bluetooth audio speakers, play music on with one-touch screen</li> <li>*2-gang relay switch, support wire lights, fans,etc.</li> <li>*Supports working with zigbee sub-device, such as zigbee wall switch, zigbee bulb, zigbee curtain motor, zigbee rolling shutter motor, etc.</li> </ul> <p><b>Specification:</b></p> <ul style="list-style-type: none"> <li>• Color: grey</li> <li>• Operation system: Android 8.1</li> <li>• CPU: Quad-core Cortex-A35</li> <li>• CPU frequency: 1.5Ghz</li> <li>• Main screen size: 8 inch</li> <li>• Resolution: 1280*800</li> <li>• Material: IPS (full viewing angle)</li> <li>• Touch screen: Multi-touch capacitive screen</li> <li>• Storage: 2GB</li> <li>• Expandable memory: 8 GB</li> <li>• USB: 2.0 interface, can read 32G</li> <li>• LAN port: No</li> <li>• WiFi: Yes</li> <li>• Bluetooth: 4.0</li> </ul> <p><b>Packing information:</b> Product weight: 0.4kg Product dimension: 255*133*10mm Giftbox weight: 1.3kg Giftbox dimension: 342*213*73mm</p>	
3	 <p>8-Inch full touch screen smart home gateway</p>	GS-F8-4CH (4-way wired ceiling speakers) -- <b>Speakers not in the box</b>	<p><b>F12 is 12.30" touch screen music playback &amp; smart home control panel with built-in gateway.</b></p> <p>Key features: It comes with WiFi and Lan connection, ZigBee 3.0, added 100 sub-devices can be control.</p> <ul style="list-style-type: none"> <li>* Built-in speakers, and also can connect external speakers/amplifier</li> <li>*Customize your home scene, one tap to run.</li> <li>*2-gang relay switch, support wire lights, fans,etc.</li> <li>*Supports working with zigbee sub-device, such as zigbee wall switch, zigbee bulb, zigbee curtain motor, zigbee rolling shutter motor, etc.</li> </ul> <p><b>Specification:</b></p> <ul style="list-style-type: none"> <li>• Split 4-mic voice control (Hello, Xiaozhi)</li> <li>• 12.3-inch IPS display screen, 1920 *720 resolution</li> <li>• Support Tuya ZIGBEE gateway</li> <li>• System memory 2G, storage memory 8G</li> <li>• Android 11 system, quad-core processor, CPU: 1.8HZ</li> <li>• Power supply method: AC 110-250V (other power supply methods can be customized with a minimum order of 1K)</li> <li>• Lighting control: Two-way local lighting control 2 *200 W</li> <li>• Network: WIFI wired network</li> <li>• Bluetooth: Yes (transmission and interface)</li> <li>• 485 interface: support (music part)</li> <li>• Speaker output power: 2 *25W (digital power amplifier)/analog audio output (dual background music version can be connected to four speakers, the price plus \$4.00 for each)</li> </ul>	
4	<p><b>NEW</b></p> <p>2-gang relay switch &amp; 2-way speaker</p>  <p>12" Touch Screen Music Playback &amp; Smart home Control Panel</p>	GS-F12		
5	<p><b>TOP SELLING</b></p>  <p>4" touch smart voice control panel with built-in Alexa <b>(WIFI+Zigbee +BLE)</b></p>	T1E-TPP01-Z	<p><b>T1E is a Tuya smart central control panel integrated with Tuya smart home gateway + built-in Alexa voice control (English, Spanish, German &amp; French) + super Zigbee device compatibility + group dimming system.</b></p> <p>Main Features:</p> <ol style="list-style-type: none"> <li>1. A best alternative of tuya ZigBee gateway at home, 100+ Zigbee sub-devices can be added in.</li> <li>2. 3 Control modes at different distance with 3 themes</li> <li>3. Multimedia interconnection function. Add smart doorbell and smart camera, which will show the screen outside the door when someone rings the bell, contributing a higher level of security to the family.</li> <li>4. Support group wireless dimming lighting. Works with Zinbee dimming driver, can realize single light and group lights dimming.</li> </ol> <p> </p>	 <p>works with the Google Assistant</p> <p>WORKS WITH amazon alexa</p> <p>   </p>











6	 <p><b>NEW</b></p> <p>06:30</p> <p>5 inch(US standard)</p> <p>5" Touch screen control panel for smart home</p>	<p>T5E is a Tuya smart central control panel integrated with Tuya smart home gateway + built-in Alexa voice control (English, Spanish, German &amp; French) + super Zigbee device compatibility + group dimming system.</p> <p>Main features:</p> <ul style="list-style-type: none"> <li>- Built-in Zigbee Gateway</li> <li>- Built-in BLE Mesh</li> <li>- In-wall to replace a switch</li> <li>- Local control ( off-network)</li> <li>- Edge computing</li> <li>- Alexa Built-in</li> </ul> <p>alexabuilt-in</p>		
7	 <p>10" Touch Control Panel with Music Play (WiFi+Zigbee+Lan + Wired ceiling speakers)</p>	<p>F10 is a tuya smart home gateway with 10 inch touch screen, Android operation system, supports music playback.</p> <p>Key features:</p> <ul style="list-style-type: none"> <li>It comes with WiFi and wifi connection, ZigBee 3.0, added 100 sub-devices</li> <li>*Local control and local smart scene</li> <li>*Customize your home scene, one tap to run.</li> <li>*Can support wired and bluetooth audio speakers, play music on with one-touch screen</li> <li>*2-gang relay switch, support wire lights, fans,etc.</li> <li>*Supports working with zigbee sub-device, such as zigbee wall switch, zigbee bulb, zigbee curtain motor, zigbee rolling shutter motor, etc.</li> </ul>		
8	 <p><b>TOP SELLING</b></p> <p>09:26</p> <p>10" Touch Control Panel with tuya gateway</p>	<p>MAX is a Tuya smart central control panel, ZigBee &amp; Bluetooth independent chips, integrate Zigbee and Bluetooth gateway functions, support Bluetooth BLE &amp; BLE mesh Sub-devices, and have edge capabilities for localized control.</p> <p>Device control: Fully compatible device access and diversified control forms are compatible with almost all Tuya ecological devices.</p> <p>Scene control: Customs physical buttons, screen interaction, and voice interaction can trigger scenes to meet different needs in life.</p> <p>I-Share technology and T- Control Technology</p> <p>Rich interface: A variety of base forms are supported, the standard base uses zero-fire wire wire wiring, supports dual relays, RJ45 network port and RS485.</p> <p>alexabuilt-in</p>		 <p>works with the Google Assistant</p> <p>WORKS WITH amazon alexa</p>
9	 <p><b>NEW</b></p> <p>F6-1 (Built-in 2 gang relay switch)</p>	<p>F6 is 6" touch screen music playback &amp; smart home control panel with built-in gateway.</p> <p>Key features:</p> <ul style="list-style-type: none"> <li>It comes with WiFi and Lan connection, ZigBee 3.0, added 100 sub-devices can be control.</li> <li>*Customize your home scene, one tap to run.</li> <li>*2-gang relay switch, support wire lights, fans,etc. (Model F6-2)</li> <li>*Supports working with zigbee sub-device, such as zigbee wall switch, zigbee bulb, zigbee curtain motor, zigbee rolling shutter motor, etc.</li> <li>*With a power amplifier, two wired speakers can be connected.</li> <li>* Support audio input/output.</li> <li>* Bluetooth receiving function. You can connect the host to play the music on the mobile phone through the Bluetooth of the mobile phone.</li> </ul>		
10	 <p>F6-2 (Support 2-way wired speakers)</p> <p>6" touch screen control panel with music play</p>	<ul style="list-style-type: none"> <li>* With a physical button, short press to lock/off the screen; long press to shut down.</li> <li>* With a TF card slot, it can read a maximum of 32G cards. With a TYPE-C interface and an adapter cable, it can read a U disk with a maximum of 32G.</li> <li>* Can play local music and online music.</li> <li>* With a knob. The knob can add equipment control equipment, such as air conditioners, curtains, light groups, and volume adjustment.</li> </ul>		
11	 <p><b>NEW</b></p> <p>7" touch screen control panel with gateway &amp; music play</p>	<p>F7 is a tuya smart home gateway with 7 inch touch screen, Android operation system, supports music playback.</p> <p>Key features:</p> <ul style="list-style-type: none"> <li>It comes with WiFi and LAN connection, ZigBee 3.0, added 100 sub-devices</li> <li>Local control and local smart scene</li> <li>Customize your home scene, one tap to run.</li> <li>Can support wired and bluetooth audio speakers, play music on with one-touch screen</li> <li>upports working with zigbee sub-device, such as zigbee wall switch, zigbee bulb, zigbee curtain motor, zigbee rolling shutter motor, etc</li> </ul> <p>Specification:</p> <ul style="list-style-type: none"> <li>• Color: black</li> <li>• Operation system: Android 8.1</li> <li>• CPU: Quad-core Cortex-A35</li> <li>• CPU frequency: 1.5GHz</li> <li>• Main screen size: 7 inch</li> <li>• Resolution: 1024 * 600, IPS</li> <li>• Material: IPS (full viewing angle)</li> <li>• Touch screen: Multi-touch capacitive screen</li> <li>• Storage: 2GB</li> <li>• Expandable memory: 8 GB</li> <li>• USB: 2.0 interface, can read 32G</li> <li>• LAN port: Yes</li> <li>• WiFi: Yes</li> <li>• Bluetooth: 4.0</li> <li>• Resolution: 240 * 240</li> <li>• Product dimension: 235 * 111.60 * 11.50mm   product weight: 0.499kg</li> </ul>		
12	 <p>6" touch screen control panel</p>	<p>S8 is a touch control panel integrated Tuya gateway capability, devices and scenes control, calendar and weather, alarm lock and etc. It has 6" touch LCD screen and a rotaryswitch for easy thermostat control and smart home central control.</p> <p>Features:</p> <ul style="list-style-type: none"> <li>*Tuya /Smart Life APP wireless remote control,IOS &amp; Android supported phone.</li> <li>*Touch to control smart devices in the whole house ,making it easy to accurately control the equipment</li> <li>*Create your smart own scene</li> <li>*Timing Function</li> <li>*6 inch Full touch screen operation display with rotary button</li> <li>*Customizable linkage scenes , touch the panel to quickly switch scene modes</li> <li>*RS-485 Central Control Agreement</li> <li>*Commonly used in hotels,home, apartment,store, spa and etc.</li> </ul>		
13	 <p>7-Inch full touch screen smart home gateway</p>	<p>FX is a tuya smart home gateway with 7 inch touch screen, Android operation system, supports music playback.</p> <p>Key features:</p> <ul style="list-style-type: none"> <li>It comes with WiFi and wifi connection, ZigBee 3.0, added 100 sub-devices</li> <li>Local Smart home control</li> <li>Customize your home scene, one tap to run.</li> <li>Can support wired and bluetooth audio speakers, play music on with one-touch screen</li> <li>upports working with zigbee sub-device, such as zigbee wall switch, zigbee bulb, zigbee curtain motor, zigbee rolling shutter motor, etc</li> </ul> <p>Specification:</p> <ul style="list-style-type: none"> <li>• Color: grey</li> <li>• Operation system: Android 8.1</li> <li>• CPU: Quad-core Cortex-A35</li> <li>• CPU frequency: 1.5GHz</li> <li>• Main screen size: 7 inch</li> <li>• Resolution: 1024 * 600, IPS</li> <li>• Material: IPS (full viewing angle)</li> <li>• Touch screen: Multi-touch capacitive screen</li> <li>• Music format: MP3,</li> <li>• Storage: 2GB</li> <li>• Expandable memory: 8 GB</li> <li>• USB: 2.0 interface, can read 32G</li> <li>• LAN port: Yes</li> <li>• WiFi: Yes</li> <li>• Bluetooth: 4.0</li> <li>• Product weight: 0.4kg</li> <li>• Product dimension: 255 * 111.6 * 11.5mm</li> <li>• Giftbox weight: 1.05kg</li> <li>• Giftbox dimension: 240 * 196 * 100mm</li> </ul>		

<p>14</p>	 <p>4 inch touch screen gateway (Zigbee &amp; WiFi)</p>	<p>T8E</p>	<p>T8E is a tuya smart home gateway with 4 inch touch screen. T8E comes with WiFi connection, ZigBee 3.0, added 99+ sub-devices</p> <ol style="list-style-type: none"> <li>Local control and local smart scene</li> <li>Customize your home scene, one tap to run.</li> <li>Supports working with zigbee alarm sensor, such as door sensor motion sensor to secure the house.</li> <li>Can connect the tuya wifi video doorbell, and realize two-way communication.</li> <li>Can be working with tuya smart camera, and view real-time monitoring on panel</li> </ol> <p>Specification:          ①CPU:PX30 Quad core Cortex-A35;   ②OS: Android 8.1          ③RAM:1GB                               ④ Screen:4 inch 480*480 Multi-touch          ⑤ROM:8GB                               ⑥ Bluetooth:BLE4.2 Single Point          ⑦Ethernet:N/A                           ⑧RS485 : N/A          ⑨WiFi:2.4G                              ⑩Wireless transmission:Zigbee</p>		
<p>15</p>	 <p>4 Inc full touch screen smart home gateway</p>	<p>T8E-Linux</p>	<p>T8E is a tuya smart home gateway with 4 inch touch screen. T8E comes with WiFi and Ethernet connection, ZigBee 3.0, added 99+ sub-devices</p> <ol style="list-style-type: none"> <li>Local control and local smart scene</li> <li>Customize your home scene, one tap to run.</li> <li>Supports working with zigbee sub-device, such as zigbee wall switch, zigbee bulb, zigbee curtain motor, zigbee rolling shutter motor, etc</li> </ol> <p>Specification:          * Built-in WiFi module          * Built-in Zigbee module          * Support RJ45 wired network.          * Support OTA remote upgrade          * Support of FlyThing UI makes development more convenient and efficient          * Support long time uninterrupted standby work, the motherboard does not heat, do not appear black screen of death          * 3 seconds startup speed, more quickly experience the wisdom scene</p>		
<p>16</p>	 <p>4" touch screen control panel with 2-way speakers</p>	<p>GS-F1</p>	<p>F1 is a touch control panel integrated Tuya gateway capability, devices and scenes control, timing music playback and etc. It has 4" touch LCD screen and smart home central control.</p> <p>Features:          *Tuya /Smart Life APP wireless remote control, IOS &amp; Android supported phone.          *Touch to control smart devices in the whole house ,making it easy to accurately control the equipment          *Create your smart own scene          * 2-way external speakers, and support one group audio input AUX.          * Support of FlyThing UI makes development more convenient and efficient          *Customizable linkage scenes , touch the panel to quickly switch scene modes          *RS-485 Central Control Agreement          *Commonly used in hotels,home, apartment,store, spa and etc.          * Support local, TF card, U-disk and BLE, AUX play music.</p>		
<p>17</p>	 <p>7" Touch screen music playback control panel (without gateway feature)</p>	<p>GS-A7</p>	<p>GS-A7 is a music playback control panel, that support playback music and 8-way wired speakers. It also can be displayed the tuya smart devices ( wifi smart devices)</p> <ul style="list-style-type: none"> <li>7-inch IPS display screen, 1024*600 resolution</li> <li>System memory 2G, storage memory 16G</li> <li>Android 8.1 system, quad-core processor, CPU: 1.5HZ</li> <li>Power supply mode: AC 110-250V/124/2V</li> <li>Output power: 8*20W (Yamaha digital power amplifier), two-zone sound effect adjustment, 4-way volume adjustment.</li> <li>One set of audio input and one set of output</li> <li>Analog bass output: one set</li> <li>HDMI: output 1080P</li> <li>Network: WiFi</li> <li>Karaoke: support family Karaoke</li> <li>Bluetooth: support (connect mobile phone via BLE)</li> <li>Installation method: pre-embedded wire box, front mounted on the wall</li> <li>Product weight: 1.2KG</li> <li>Product size: 185*125*10.5MM</li> </ul> <p>Tips: English version support Tuya App, Arabic, Polish only can be used as a music playback control panel, doesn't support IoT feature.</p>		
<p>18</p>	 <p>Wired Ceiling speakers</p>	<p>GS-XDLB-VXS-C</p>	<p>Main features:          - Bass 5.25" polypropylene diaphragm, rubber surround, 12oz magnet, 25mm (1") voice coil.          - Tweeter Natural silk dome diaphragm, 25mm (1") voice coil, ferrofluid cooling, NdFeB magnets.          - Crossover Modified phenolic resin PCB board, -12dB/Oct low-pass filter, -12dB/Oct high-pass filter, treble PTC overload protection.          - Resonant frequency 65Hz          - Frequency response 50Hz-20KHz          - Sensitivity 86dB/W/M          - Recommended amplifier power 10-80W (rated power 40W)          - Impedance 8Ω          - Hole size 185mm(7.29")          - Accessories Aluminum mesh, aluminum mesh hook, perforated template, spray paint card and instruction manual.</p>		
<p>19</p>	 <p>ZIGBEE Gateway (wired RJ45 port)</p>	<p>ZIG-01</p>	<p>ZIG-01 is a Multi-mode Ethernet (wired) smart home gateway. It supports all kinds of tuya smart Zigbee sub-devices, such as Zigbee wall switch, zigbee PIR human movement sensor, Zigbee temperature and humidity sensor, Zigbee curtain motor, etc.</p> <p>Parameter:          1)Standard:IEEE 802.15.4          2)Frequency:2.4 ~ 2.485GHz          3)Transmission rate: 250kbps          4)Receiving sensitivity:-102dBm , PER&lt;10%          5)Open area transmission distance: 100M to 200M</p> <p>- Power supply: 5V1A          - Working temperature: -10~45℃          - Wireless communication protocol: 2.4G wireless &amp; Zigbee &amp; BLE &amp; Mesh          - Product dimension: 60*60*15mm</p>		 <p>works with the Google Assistant</p> <p>WORKS WITH amazon alexa</p>
<p>20</p>	 <p>Zigbee &amp; BLE gateway hub</p>	<p>BLE-G01</p>	<p>ZigBee+Bluetooth Multimode Gateway (with USB cable)          One-key arm/disarm/sound and light alarm/voice prompt/doorbell/alarm clock/LED indicator adjustment/security SAAS</p> <ul style="list-style-type: none"> <li>Support voice control</li> <li>Support Google Home finger robot</li> <li>Support Zigbee PIR movement sensor</li> <li>Support Bluetooth humidity and temperature sensor</li> <li>Zigbee blind curtain motor</li> </ul> <p>Parameter:          - Power supply: 5V 1A          - Working temperature: -10~45℃          - Wireless communication protocol: 2.4G wireless &amp; Zigbee &amp; BLE &amp; Mesh          - Product dimension: 92*92*40mm          - Product weight: 119g</p> <div style="border: 1px solid black; padding: 5px; width: fit-content;"> <p>Single weight: 179g              Product size: 9.3 * 9.3 * 8.6              FCL weight: 10kg              Outer box size: 51.5 * 51.5 * 23 50 packs</p> </div>		 <p>works with the Google Assistant</p> <p>WORKS WITH amazon alexa</p>


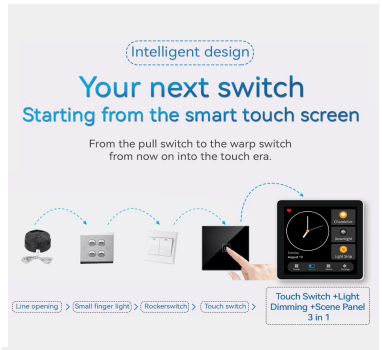















**Smart Sensors/IR Controllers**
















No.	Picture	Model	Features	Compatible devices
21	<p>TOP SELLING</p> <p>SPECIFICATION</p> <p>PIR and microwave sensor WiFi/Zigbee</p>	GS-HP-WIFI	Product name: PIR and microwave sensor 1. Wireless technology: Zigbee/WIFI 2. Work voltage: DC12V 3. Work Current: <math>\leq 70mA</math> 4. Work temperature: $-20^{\circ}C \sim +70^{\circ}C$ 5. Sensitivity: 0-9 (Default 7) 6. Detect distance: 0.3-9m (Default distance 6m) 7. Delay time: ① target detection confirmation time: 0-10s ② target disappearance delay time: 0.5s-25min. It is recommended not to be less than 15 seconds. If too small, easy to miss 8. Light sense: 0-2000lux 9. Installation mode: ceiling 10. Product Size: 53*30	
22		GS-HP-ZIGBEE		
23	<p>PIR and microwave sensor WiFi</p>	GS-RDR-WIFI	Product name: PIR and microwave sensor 1. Wireless technology: Zigbee 2. Work voltage: +5V 3. Channel number: CH1-CH26 4. Work temperature: $-20^{\circ}C \sim +60^{\circ}C$ 5. Transmitted power: 2dBm 6. Working frequency: 10.525Ghz ① Human Body movement ,movement detection function. ② Human body still detection, if somebody is still, there is no movement, like sitting, sleeping, reading, the microwave sensor is also can detect there is no movement. ③ presence time detection, the microwave sensor can detect the time someone is existed. ④ No presence Time detection, the microwave sensor can detect the exact time no one is existed.	Product size: 85MM*85MM*27MM
24	<p>PIR and microwave sensor Zigbee</p>	GS-RDR-ZIGBEE	Product name: PIR and microwave sensor 1. Wireless technology: Zigbee 2. Work voltage: +5V 3. Channel number: CH1-CH26 4. Work temperature: $-20^{\circ}C \sim +60^{\circ}C$ 5. Transmitted power: 2dBm 6. Working frequency: 10.525Ghz ① Human Body movement ,movement detection function. ② Human body still detection, if somebody is still, there is no movement, like sitting, sleeping, reading, the microwave sensor is also can detect there is no movement. ③ presence time detection, the microwave sensor can detect the time someone is existed. ④ No presence Time detection, the microwave sensor can detect the exact time no one is existed.	Product size: 85MM*85MM*27MM
25	<p>Human Movement Infrared Detector</p>	GS-PIR	zigbee series Infrared human body sensor	
26	<p>Wi-Fi remote controller</p>	UFO-R6	<b>Wi-Fi remote controller with 5V 1A USB power charger</b> Working Humidity: <math>\leq 85\%RH</math> Power Input: 5V DC 1A (Micro USB) IR Distance: <math>\leq 8m</math> Working Temperature: $0-50^{\circ}C$ Size: 2.6in*2.6in*1.06in 65mm*65mm*27mm	
27	<p>WIFI IR+RF remote controller</p>	UFO-R1-RF	<b>WIFI IR+RF remote controller</b> Working Humidity: <math>\leq 85\%RH</math> Power Input: 5V DC 1A (Micro USB) IR Distance: <math>\leq 8m</math> Working Temperature: $0-50^{\circ}C$ RF: 433mhz/315mhz	
28	<p>ZIGBEE infrared remote control</p>	UFO-R11	Input power: 3A battery x2 Standby power: <math>\leq 0.5W</math> Control distance: <math>\leq 8m</math> (finally affected by the environment) Infrared frequency: 38KHZ Working temperature: $0^{\circ}C \sim 50^{\circ}C$ Working humidity: <math>\leq 85\%RH</math> (no condensation) Wireless protocol: Zigbee Executive standard: GB/T9254-2008 Product Size: 66x66x27mm	<p>Wired hub is a must</p>
29	<p>Temperature and humidity sensor</p>	GS-KCTW1Z-01	Product Name: ZigBee Temperature Humidity Sensor Wireless protocol: ZigBee Temperature measurement range: $-10^{\circ}C \sim 50^{\circ}C$ Humidity measurement range: 0%-99%RH Working voltage: DC2.4V-3V Battery specification: CR2032 button cell Product size: $\phi 40 \times 16.7mm$ (ROUND) / $16.7 \times 60 \times 60mm$ (SQUARE) Screen size: $\phi 46.5mm$ (ROUND) / $46.5 \times 46.5mm$ (SQUARE) Product net weight: 42g (ROUND) / 49.5g (SQUARE)	Package List: Temperature Humidity Sensor*1 Product manual*1 Wall sticker*1
30	<p>Water leak detector sensor</p>	GS-QY-WL-C-MS	Product name: Type: Water Level Alarm Power Supply: 3V 1*CR2032 Standby Time: 2 years Protocol: ZigBee APP: Tuya smart/Smart life Support systems: Android and IOS Waterproof: IP66 Material: ABS Operating Temperature: $-10^{\circ}C \sim +55^{\circ}C$ Item Size: 50*18mm	
31	<p>Tuya ZigBee SOS Button Alarm</p>	GS-Z-SOS	Specifications: Battery: CR2032 Working temperature: $-20^{\circ}C \sim 60^{\circ}C$ Working humidity <math>\leq 95\%RH</math> (non-condensing)) Emission frequency: 10dBm Emission current: peak value 45mA, average 1-2mA Quiescent current: 2-3uA Emission distance: 100m+ (Open space) Wireless frequency: Zigbee 2.4GHz	
32	<p>wireless door/window sensor</p>	ZSS-JM-GWM	Specifications: Wireless Technology: ZigBee Working Voltage: 2.4V-3.3V (CR2032 battery) Transmission Frequency: 2.4GHz Working Temperature: $-20^{\circ}C \sim +60^{\circ}C$ 0%-95%RH Transmission Range: Indoor: 10-30m/Outdoor: 30-50m Size Main Body: 40*25*12mm Size Small Body: 25*10*9mm Package list: Sensor*1 User Manual*1	





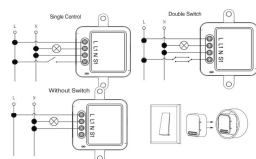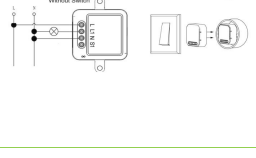







33	 <p>Zigbee door and window vibration sensor</p>	ZSS-Z-VBR	<p>Characteristic:</p> <ol style="list-style-type: none"> <li>1. Realize remote control on Smart Life APP through mobile phone network or WIFI.</li> <li>2. Real-time monitoring of device changes, push notifications when sensing device movement, drop, impact, vibration and other state changes, and use it with other Tuya Zigbee or WIFI devices to realize automatic scene applications.</li> <li>3. Use with Zigbee gateway</li> </ol> <p>Parameters:</p> <ul style="list-style-type: none"> <li>Working voltage DC 3V</li> <li>Quiescent current 10uA</li> <li>Alarm current 20mA</li> <li>Communication method Zigbee</li> <li>Transmission distance 10-30m (indoor without shelter)</li> <li>LED indicator: YES</li> <li>Installation method: 3M glue or screw fixing</li> <li>Battery: AAA alkaline battery 1.5V*2</li> <li>Working temperature: -10°C ~ 50°C</li> <li>Working humidity: ≤95% (no condensation)</li> <li>Reporting frequency: half an hour</li> </ul>	
34	 <p>WiFi Door/Window alarm</p>	D41	<ol style="list-style-type: none"> <li>1. support tuya smart APP</li> <li>2. support google home &amp; amazon alexa</li> <li>3. door open alert, app notification</li> <li>4. real time monitoring for in &amp; out at the quarantine places.</li> <li>5. App remote monitoring, multi-level prevention and control</li> <li>6. installation distance: ≤2cm</li> <li>7. trigger range: 2-3cm</li> <li>8. Operating temperature: 0°C ~ 50°C</li> </ol>	<div style="border: 1px solid black; padding: 5px;"> <ol style="list-style-type: none"> <li>1. Working voltage: 3V (2*AA battery)</li> <li>2. Working current ≤19-59mA</li> <li>3. standby current: ≤35uA</li> <li>4. connect method: wifi (802.11b/g/n)</li> </ol> </div>
35	 <p>Wireless Strobe Siren Alarm</p>	WIFI-SLA-U	<p>Sound and light flash siren (USB type), Zigbee version and WIFI version for option</p>	
36	 <p>Wireless Strobe Siren Alarm</p>	ZIGBEE-SLA-U		<p>Single weight: 110g Product size: 8.5*5*9.5 FCL weight: 4.8kg FCL size: 45*27*21 50 packs</p>
37	 <p>WiFi gas leakage detector</p>	GS21	<p>1.77" TFT color display, Tuya APP remote push, Sound and light alarm, real voice prompt, mobile phone alarm push, Perpetual calendar, real-time ambient temperature and combustible gas display, Combustible gas alarm, High temperature alarm (alarm threshold can be set), Green power indicator Light, red alarm indicator, yellow sensor fault indicator, yellow life indicator, Test/silence button, Support Chinese and English, Alarm linkage solenoid valve/manipulator external air cut-off device.</p> <p>Detecting gas type:(natural gas and LPG)</p>	
38	 <p>WiFi Smoke Alarm</p>	GS443W	<p>Tuya cloud platform APP alarm information push. High sensitivity, low power consumption, strong stability. Ultra long life battery power supply. Install to use, no wiring plug trouble. Ceiling installation. Live alarm with ultra loud buzzer. 360° all-round alarm. ABS flame retardant shell material. Using high-performance microprocessor.</p> <p>Specification:</p> <ul style="list-style-type: none"> <li>Power supply: DC9Valkaline battery (6LR61/9V)</li> <li>Quiescent current: &lt;10uA(wifi) &lt;20uA(independent)</li> <li>Alarm current: &lt;100mA(wifi)&lt;150mA(independent)</li> <li>Sensitivity:0.05~2.0dB(m/independent)</li> <li>Working temperature: 0°~50° C</li> <li>Relative humidity: ≤95%RH, no condensation</li> <li>Alarm sound:&gt;80dB</li> <li>Battery low voltage alarm:&lt;7.0V ± 0.2V</li> <li>Product size: 107x107x48mm(LxHxD)</li> </ul>	
39	 <p>Zigbee Smoke alarm</p>	GS-441SM	<p>Smart Zigbee Photoelectric smoke fire alarm detector (9V battery)</p> <ul style="list-style-type: none"> <li>- Be compatible with Amazon Alexa/Google home assistant</li> <li>- Strong anti-interference</li> <li>- Real-time detection</li> <li>- Zigbee communication</li> <li>- Mobile phone app Alarm</li> <li>- Smoke detection alarm</li> <li>- 85Db high decibel alarm</li> <li>- Low power consumption</li> </ul> <p>Wireless protocol: ZigBee 3.0 Transmitting power: 10dbm Operation voltage: DC9V Operation Temperature: -10 °C ~ +55 °C Alarm sound level: 80dB ( in front 3m) Detection range: 50 sqm</p>	
40	 <p>WiFi Natural Gas Alarm Detector</p>	GS-210W	<p><b>Product features</b></p> <ul style="list-style-type: none"> <li>- Real-time reporting of alarm concentration.</li> <li>- With voice prompt alarm function.</li> <li>- Support push gas alarm to the cloud.</li> <li>- Support remote self-inspection of device.</li> <li>- Anti-electromagnetic interference, anti-radio frequency interference.</li> </ul> <p><b>Technical parameters</b></p> <ul style="list-style-type: none"> <li>Quiescent current:&lt;150mA</li> <li>Alarm current:&lt;300mA</li> <li>Alarm sound:&gt;80dB</li> <li>Operating temperature:-10°~55°C</li> <li>Relative humidity:≤93%RH</li> <li>Size:99.5x99.5x34mm(LWxT)</li> </ul>	
41	 <p>Tuya Bluetooth smart home finger robot with touch button (3rd generation)</p>	BS-FB-V3	<ol style="list-style-type: none"> <li>1. New upgraded Fingerbot Plus is designed with the touch button on the device for easier ON/OFF control of the robotic arm to home traditional switches and buttons,transforming them into smart ones by simple click with the bot button pusher with its smart compatibility with Tuya Smart APP</li> <li>2. Extremely simple pairing mode into Tuya Smart APP with your phone Bluetooth on and 2.4G WIFI connected for this Bluetooth version</li> <li>3. Smartly control your traditional appliances via voice command by Alexa,Google Assistant and Siri,activating vacuum with voice, and remotely power on your office PC or house traditional appliances with switch or button design with no effort with Bluetooth hub required.</li> <li>4. Fingerbot Plus is compatible with various buttons and switches.</li> <li>5. Its modular design allows users to replace its arm with various tool pack options for extending its capability in various cases.</li> </ol> <p>Note:</p> <ol style="list-style-type: none"> <li>1. Bluetooth gateway is required for wireless remote control and voice control by voice assistants.</li> <li>2. The robotic arm can be used alone, but it can only be controlled properly within the Bluetooth-compatible connection range (about 10 meters).</li> </ol> <p><b>Specifications:</b></p> <ul style="list-style-type: none"> <li>Dimensions:34.5*34.5*34.5mm</li> <li>Weight:39g</li> <li>Wireless protocol:Bluetooth Low Power 4.2</li> <li>Battery type:CR2</li> <li>Stall torque:2.0 kgf·cm</li> <li>Maximum arm movement:12 mm</li> <li>Working temperature:-10°C ~ 45°C</li> </ul> <p>Packing List:</p> <ul style="list-style-type: none"> <li>Fingerbot Plus*1</li> <li>3M sticker*1</li> <li>User manual*1</li> </ul>	
42	 <p>Tuya Bluetooth smart home finger robot kit V3</p>	BS-FB-V3-KIT	<ol style="list-style-type: none"> <li>1. New upgraded Fingerbot Plus is designed with the touch button on the device for easier ON/OFF control of the robotic arm to home traditional switches and buttons,transforming them into smart ones by simple click with the bot button pusher with its smart compatibility with Tuya Smart APP</li> <li>2. Extremely simple pairing mode into Tuya Smart APP with your phone Bluetooth on and 2.4G WIFI connected for this Bluetooth version</li> <li>3. Smartly control your traditional appliances via voice command by Alexa,Google Assistant and Siri,activating vacuum with voice, and remotely power on your office PC or house traditional appliances with switch or button design with no effort with Bluetooth hub required.</li> <li>4. Fingerbot Plus is compatible with various buttons and switches.</li> <li>5. Its modular design allows users to replace its arm with various tool pack options for extending its capability in various cases.</li> </ol> <p>Note:</p> <ol style="list-style-type: none"> <li>1. Bluetooth gateway is required for wireless remote control and voice control by voice assistants.</li> <li>2. The robotic arm can be used alone, but it can only be controlled properly within the Bluetooth-compatible connection range (about 10 meters).</li> </ol> <p><b>Specifications:</b></p> <ul style="list-style-type: none"> <li>Dimensions:34.5*34.5*34.5mm</li> <li>Weight:39g</li> <li>Wireless protocol:Bluetooth Low Power 4.2</li> <li>Battery type:CR2</li> <li>Stall torque:2.0 kgf·cm</li> <li>Maximum arm movement:12 mm</li> <li>Working temperature:-10 °C ~ 45°C</li> </ul>	




### Zigbee/WiFi Smart Wall Switches

No.	Picture	Model	Features	Compatible devices
<p><b>FAQ about T3E smart wall switch &amp; scene panel 2 in 1:</b></p> <p><b>1. What place can be installed this smart multi-function touch switch?</b> This multifunctional switch can be installed in smart villas, smart meeting rooms, smart offices, smart coffee shops, smart hotels and other places.</p> <p><b>2. Can this product be used alone?</b> If used alone, it can only be used as a conventional switch, and cannot be used as a scene panel to control curtains, air conditioners and scene control full open and full open modes. But it also can be acted as a scene panel after connecting to a tuya gateway.</p> <p><b>3. Is there any special function?</b> Yes, T3E can realize localized control, and the general gateway has no localized control function. That is, when there is no network, the user cannot control the smart device through the mobile APP or the gateway, so the experience is not good. However, if our T3E switch and scene panel are installed, users can still use T3E to control local devices and use scenes.</p> <p><b>4. Can T3E provide WiFi version?</b> Due to the limitation of the software protocol, T3E currently only has the Zigbee version. At the same time, we are also developing a version of WiFi Mesh T3W, this version is not based on the Tuya app, it is based on our self-developed APP. For more information, please contact our sales representative.</p> <p style="text-align: center;"><b>One switch can be used as four products</b> T3E, Make smart life smarter and simpler</p> <div style="display: flex; justify-content: space-around; align-items: center;">  <div style="text-align: center;"> <p>1x 3-way Switch + 4x Scene Stickers</p> <p>1x Air Conditioner Controller + 1x Curtain Controller</p> </div> </div> <div style="text-align: center; margin-top: 10px;"> <p>Smart switch and scene panel 2 in 1 = 1x 3-way switch + 4x scene stickers + 1x A/C controller + 1x curtain controller</p> </div> <div style="text-align: right; margin-top: 10px;">  </div>				
43	 <p>1-gang relay switch + 1-way light dimming &amp; Scene panel 3 in 1 (EU standard)</p>	Zigbee version T3E-EU1-Z1	<p>This is a 4 inch touch screen smart wall switch with 1-4 gang relays that can be connected to lights. Wireless Zigbee connection with the smart home gateway. It can be acted as a scene panel to control the Zigbee smart light switch, smart curtain, AC etc.</p> <ol style="list-style-type: none"> <li>Compatible with European standard wall boxes, simple in wall installation.</li> <li>4-inch HD LCD, IPS, multi touch screen.</li> <li>With Dimmer switch and scene panel function, connect with the zigbee gateway.</li> <li>Control the lights, curtains, air conditioners, and all othersmart home devices. Configure Smart Home scenes in the APP, turn on the scene mode with one touch on the screen</li> <li>0 to 10V dimming just connect the lights or lamp with 0 to 10V dimming control box, and T3 control box connect with 4 inch touch pad.</li> <li>1 Gang smart switch with build in 1 relays</li> </ol>	 <p>Multi-model gateway    Wall switch &amp; scene panel</p>
44	 <p>2-gang relay switch + 2-way light dimming &amp; Scene panel 3 in 1 (CN standard)</p>	Zigbee version T3E-CN2-Z2	<p>This is a 4 inch touch screen smart wall switch with 1-4 gang relays that can be connected to lights. Wireless Zigbee connection with the smart home gateway. It can be acted as a scene panel to control the Zigbee smart light switch, smart curtain, AC etc.</p> <ol style="list-style-type: none"> <li>Compatible with CN/Asian standard wall boxes, simple in wall installation.</li> <li>4-inch HD LCD, IPS, multi touch screen.</li> <li>With Dimmer switch and scene panel function, connect with the zigbee gateway.</li> <li>Control the lights, curtains, air conditioners, and all othersmart home devices. Configure Smart Home scenes in the APP, turn on the scene mode with one touch on the screen</li> <li>0 to 10V dimming just connect the lights or lamp with 0 to 10V dimming control box, and T3E control box connect with 4 inch touch pad.</li> <li>Temperature color and brightness dimming feature, the below wired 0 to 10V Dimming Power Driver is needed.</li> </ol> <div style="display: flex; justify-content: space-around; margin-top: 10px;">   </div> <p>(For downlight &amp; Spotlight)                      (For light strip)</p>	 <p>Multi-model gateway    Wall switch &amp; scene panel</p>
45	 <p>3-Gang smart wall switch &amp; Scene Panel 2 in 1 (EU standard)</p>	T3E-EU3-Z0	<p>This is a 4 inch touch screen smart wall switch with 1-4 gang relays that can be connected to lights. Wireless Zigbee connection with the smart home gateway. It can be acted as a scene panel to control the Zigbee smart light switch, smart curtain, AC etc.</p> <p>Parameter: Color:black Size: 87mm*87mm*12.5mm Touch screen: G+G 5 touch industrial grade capacitive screen Display: 480*480 HD IPS LCD CPU: Xtensa - LX7 dual core 240MHz Operating System: RTOS Network: Wireless Zigbee Load: single 200W, the total load does not exceed 600W Installation method: pre-embedde</p>  <p style="text-align: center;">T3E-EU3-Z0 Multi-functional Smart Scene Panel (3-gang relay switch)</p>	 <p>Multi-model gateway    Wall switch &amp; scene panel</p>
46	 <p>4-Gang smart wall switch &amp; Scene Panel 2 in 1 (CN santandard wall based)</p>	T3E-CN4-Z0	<p>This is a 4 inch touch screen smart wall switch with 1-4 gang relays that can be connected to lights. Wireless Zigbee connection with the smart home gateway. It can be acted as a scene panel to control the Zigbee smart light switch, smart curtain, AC etc.</p> <p>Parameter: Color:black Size: 87mm*87mm*12.5mm Touch screen: G+G 5 touch industrial grade capacitive screen Display: 480*480 HD IPS LCD CPU: Xtensa - LX7 dual core 240MHz Operating System: RTOS Network: Wireless Zigbee Load: single 200W, the total load does not exceed 600W Installation method: pre-embedde</p>	 <p>Multi-model gateway    Wall switch &amp; scene panel</p>
47	 <p>0 to 10V Dimming Power Driver for Downlights and Spotlights (only dimming the brightness)</p>	EUP10A-1HMC-120/350 (8 current gear mini models) (version 201)	<p>Input Voltage: 100-240V (It can only adjust the brightness of the light) Input Voltage: 9-42V Dimming Mode: 0-10V Version: 201 Number of Channels: 1 10W Product size (mm): 110*30*22 <b>0-10V dimming system work with T3E-CN2-Z2 and T3E-EU1-Z1</b></p>	 <p>Multi-functional Smart Scene Panel (1-way dimming 0-10V relay switch)</p>
48	 <p>0 to 10V Dimming Power Driver for Downlights and Spotlights (dimming the brightness and color)</p>	EUP12A-2HMC-1 (version 101)	<p>Input voltage: 100-240V (It can adjust the brightness and color temperature of the light) Output voltage: 9-42V Dimming method: 1-10V DC Number of channels: 2 12W <b>0-10V dimming system work with T3E-CN2-Z2 and T3E-EU1-Z1</b></p>	
49	 <p>0 to 10V Dimming Power Driver for light strip</p>	EUP24A-1H24V-1	<p>Input voltage: 220VAC-240VAC                      Frequency: 50/60Hz Output channel: 1                                      Efficiency: &gt;85%@230VAC, full load Output voltage: 24VDC                              Power factor: &gt;0.95@230VAC, full load Output current: 1A Output power: 24W</p>	

		Zigbee/WIFI Hidden smart switch		
50	 <p>WIFI smart switch</p>	GS-101	Input voltage: 90-250V AC 50/60HZ Maximum power: 2200W/10A Single weight: 51g Product size: 9.1*4.2*2.5cm FCL weight: 11.5kg FCL size: 38*22*30cm 200 packs	Single weight: 54g Size: 5.9*5.3*2.8cm FCL weight: 17.2kg FCL size: 36.5*28*28.5cm 300 packs
51	 <p>ZigBee Hidden smart switch 1-Gang with RF433MHz</p>	GS-MS-104Z	Hidden breaker 1 GANG 1. Small size, hidden in the switch box 2. The traditional switch and the smart switch operate independently, Do not interfere with each other 3. Can be used for dual control switch, Two switches control the same light 4. Can control 1-way dual-control switch Input voltage: 90-250V AC 50/60H Maximum current: 10A	Single weight: 54g Size: 5.9*5.3*2.8cm FCL weight: 17.2kg FCL size: 36.5*28*28.5cm 300 packs
52	 <p>Zigbee Hidden smart switch 2-Gang with RF433</p>	GS-MS-104BZ	Hidden breaker 2 GANG 1. Small size, hidden in the switch box 2. The traditional switch and the smart switch operate independently, Do not interfere with each other 3. Can be used for dual control switch, Two switches control the same light 4. Can control two-way dual-control switch Input voltage: 90-240V AC 50/60HZ Maximum current: 10A total	Single weight: 54g Size: 5.9*5.3*2.8cm FCL weight: 17.2kg FCL size: 36.5*28*28.5cm 300 packs
53	 <p>Zigbee Hidden smart switch 3-Gang without RF</p>	GS-MS-104CZ	Hidden zigbee switch 3 GANG 1. Small size, hidden in the switch box 2. The traditional switch and the smart switch operate independently, Do not interfere with each other 3. Can be used for dual control switch, Two switches control the same light 4. Can control 3-way dual control switch Input voltage: 90-240V AC 50/60HZ Maximum current: 10A total	Single weight: 54g Size: 5.9*5.3*2.8cm FCL weight: 17.2kg FCL size: 36.5*28*28.5cm 300 packs
54	 <p>ZIGBEE SCR dimming controller (one way)</p>	GS-MS-105Z	Hidden Dimming ZIGBEE Switch 1. Small size, hidden in the switch box 2. The traditional switch and the smart switch operate independently, Do not interfere with each other 3. Can be used for dual control switch, Two switches control the same light 4. Can control all the way double control switch Input voltage: 90-250V AC 50/60HZ Maximum power: 150W	Single weight: 54g Size: 5.9*5.3*2.8cm FCL weight: 17.2kg FCL size: 36.5*28*28.5cm 300 packs
55	 <p>Zigbee SCR dimming controller (two channels)</p>	GS-MS-105BZ	Hidden dimming ZIGBEE switch 2 way 1. Small size, hidden in the switch box 2. The traditional switch and the smart switch operate independently, Do not interfere with each other 3. Can be used for dual control switch, Two switches control the same light 4. Can control two-way dual-control switch Input voltage: 90-250V AC 50/60HZ Maximum power: 2*100W	Single weight: 54g Size: 5.9*5.3*2.8cm FCL weight: 17.2kg FCL size: 36.5*28*28.5cm 300 packs
56	 <p>Hidden Zigbee +RF Smart Curtain Switch</p>	GS-MS-108ZR	Hidden Zigbee+RF Smart Curtain Switch 1. Small size, hidden in the switch box 2. The traditional switch and the smart switch operate independently, Do not interfere with each other 3 With RF433 function, it can be controlled with remote control Input voltage: 90-250V AC 50/60HZ Maximum power: 500W	Single weight: 54g Size: 5.9*5.3*2.8cm FCL weight: 17.2kg FCL size: 36.5*28*28.5cm 300 packs
57	 <p>Zigbee 1-gang hidden switch</p>	GS-zigbee-SB01-SW	Voltage: AC110-240V 50/60Hz Max. Load: LED 250W 10A Operation frequency: 2.412GHz-4.484GHz Operation temp.: -10 °C~+40 °C Protocol: WIFI IEEE 802.11 b/g/h Operation range: less than 100m Dims(WxDxH) 39.2*39.2*18mm IP rating: IP20 Warranty: 2 years Networking: Zigbee 3.0	
58	 <p>Zigbee 2-gang hidden switch</p>	GS-zigbee-SB02-SW	Voltage: AC110-240V 50/60Hz Max. Load: LED 250W 10A Operation frequency: 2.412GHz-4.484GHz Operation temp.: -10 °C~+40 °C Protocol: WIFI IEEE 802.11 b/g/h Operation range: less than 100m Dims(WxDxH) 39.2*39.2*18mm IP rating: IP20 Warranty: 2 years Networking: Zigbee 3.0	
59	 <p>Zigbee 3-gang hidden switch</p>	GS-zigbee-SB03-SW	Voltage: AC110-240V 50/60Hz Max. Load: LED 250W 10A Operation frequency: 2.412GHz-4.484GHz Operation temp.: -10 °C~+40 °C Protocol: WIFI IEEE 802.11 b/g/h Operation range: less than 100m Dims(WxDxH) 39.2*39.2*18mm IP rating: IP20 Warranty: 2 years Networking: Zigbee 3.0	
60	 <p>Zigbee 4-gang hidden switch</p>	GS-zigbee-SB04-SW	Voltage: AC110-240V 50/60Hz Max. Load: LED 250W 10A Operation frequency: 2.412GHz-4.484GHz Operation temp.: -10 °C~+40 °C Protocol: WIFI IEEE 802.11 b/g/h Operation range: less than 100m Dims(WxDxH) 39.2*39.2*18mm IP rating: IP20 Warranty: 2 years Networking: Zigbee 3.0	
61	 <p>1-channel Zigbee smart curtain module</p>	GS-zigbee-CU01-Curtain	Voltage: AC110-240V 50/60Hz Max. Load: LED 250W 3A Operation frequency: 2.412GHz-4.484GHz Operation temp.: -10 °C~+40 °C Protocol: WIFI IEEE 802.11 b/g/h Operation range: less than 100m Dims(WxDxH) 39.2*39.2*18mm IP rating: IP20 Warranty: 2 years Networking: Zigbee 3.0	
62	 <p>2-channel Zigbee smart curtain module</p>	GS-zigbee-CU02-Curtain	Voltage: AC110-240V 50/60Hz Max. Load: LED 250W 2x3A Operation frequency: 2.412GHz-4.484GHz Operation temp.: -10 °C~+40 °C Protocol: WIFI IEEE 802.11 b/g/h Operation range: less than 100m Dims(WxDxH) 39.2*39.2*18mm IP rating: IP20 Warranty: 2 years Networking: Zigbee 3.0	

### Smart Outlets/Sockets

No.	Picture	Model	Features	Compatible devices	
63	 UK&CN standard WIFI 5 hole universal plug intelligent socket	GS-1539WN	<b>EU, UK, CN standard WIFI 5 hole universal plug intelligent socket</b> 1) Input voltage: 100-240VAC 50/60Hz 2) Connection mode: WiFi 3) Peak current: 13A 4) Regular Color: White/Black/gold/Gray 5) Product Size: 106*100*55mm 6) Package Size: 300gmm 7) Gross weight: 190g	MODEL NO: QTY: 50PCS G.W: 13.4KGS MEAS: 55x25x28CM	
64	 UK&CN WIFI 5-hole universal plug smart socket with two USB ports	GS-1530WN-2USB	<b>WIFI 5-hole universal plug smart socket with two USB ports</b> 1) Input voltage: 100-240VAC 50/60Hz 2) Connection mode: WiFi 3) Peak current: 13A 4) Regular Color: White/Black/gold/Gray 5) Product Size: 106*100*55mm 6) Package Size: 300gmm 7) Gross weight: 200g	MODEL NO: QTY: 50PCS G.W: 13.4KGS MEAS: 55x25x28CM	
65	 EU, UK, CN standard Zigbee 5 hole universal plug intelligent socket	GS-1539ZN	<b>EU, UK, CN standard Zigbee 5 hole universal plug intelligent socket</b> 1) Input voltage: 100-240VAC 50/60Hz 2) Connection mode: Zigbee 3) Peak current: 13A 4) Regular Color: White/Black/gold/Gray 5) Product Size: 106*100*55mm 6) Package Size: 300gmm 7) Gross weight: 190g	MODEL NO: QTY: 50PCS G.W: 13.4KGS MEAS: 55x25x28CM	
66	 Zigbee 5-hole universal plug smart socket with two USB ports	GS-1530ZN-2USB	<b>WIFI 5-hole universal plug smart socket with two USB ports</b> 1) Input voltage: 100-240VAC 50/60Hz 2) Connection mode: Zigbee 3) Peak current: 13A 4) Regular Color: White/Black/gold/Gray 5) Product Size: 106*100*55mm 6) Package Size: 300gmm 7) Gross weight: 200g	MODEL NO: QTY: 50PCS G.W: 13.4KGS MEAS: 55x25x28CM	
67	 Zigbee smart wall socket (UK-type)	Zigbee-UK16A	Zigbee smart wall socket (UK-type) * Network: zigbee 3.0 * Max power: 3000W * Working current: 16A * Rated frequency: 60Hz * Working voltage: AC110V/250 * Material: ABS flame retarding polymer * Plug Standard: UK * Power consuming: <math>\leq 0.3W</math> * Working temperature: -20 ~ 45°C (-4 ~ 113°F) * Working Humidity: <math>\leq 80\%</math> * Radio signal power: 1mW * Radio rate: 30 meter indoor * Product weight: 201g * Product dimension: 11*11*5		
68	 WiFi British socket Tuya smart socket tempered glass panel with 1USB & 1 Type C	GS-UKWS01-wifi	WiFi British socket Tuya smart socket tempered glass panel with 1USB & 1 Type C		
69		GS-UKWS01-zigbee	zigbee British socket Tuya smart socket tempered glass panel with 1USB & 1 Type C		
70	 WiFi 147 British socket Tuya smart socket tempered glass panel with 1USB & 1 Type C	GS-UKWB01	WiFi 147 British socket Tuya smart socket tempered glass panel with 1USB & 1 Type C		
71	 Smart wall socket (EU-type)	Zigbee-EU16A	Smart wall socket (EU-type) * Network: Zigbee/WiFi for your option * Max power: 3000W * Working current: 16A * Rated frequency: 60Hz * Working voltage: AC110V/250 * Material: ABS flame retarding polymer * Plug Standard: EU * Power consuming: <math>\leq 0.3W</math> * Working temperature: -20 ~ 45°C (-4 ~ 113°F) * Working Humidity: <math>\leq 80\%</math> * Radio signal power: 1mW * Radio rate: 30 meter indoor * Product weight: 201g * Product dimension: 11*11*5		
72		GS-WK-UK16M-WH-MS-WIFI			
73	 WiFi Type-C USB wall socket with 20W (EU-type)	WK-Y-EU-101C-WH-EN	WiFi Type-C USB wall socket with 20W (EU-type) * Network: zigbee 3.0 * Color: White * Input power: AC100-240V * Working current: 16A * Rated frequency: 50/60Hz * Material: ABS flame retarding polymer * Plug Standard: EU standard * USB-A: DC5V/3A, 9V/2A, 12V/1.5A; * USB-B: DC5V/3A, 9V/2.22A, 12V/1.5A * USB-A USB-C: 5V/3.4A (MAX) * Working temperature: -20 ~ 45°C (-4 ~ 113°F) * Working Humidity: <math>\leq 80\%</math> * Radio signal power: 1mW * Radio rate: 30 meter indoor * Product weight: 161g * Product dimension: 11*11*5		
74	 WiFi	WK-US2U-WH-EN	Number of holes 2 digits Number of jacks: 3 holes Number of USB ports: 1 full length; wireless switch mode: sub-control Rated current: 15A 3C rated voltage range: Above 50V 440V and below Product Series: American standard 2 plug + USB Rated voltage: AC220V Rated frequency: 60Hz rated power: Single 1500W Total 2500W Inductive load less than 2000W	USB output parameters: 5V 1A Support system: Android 4.4 or iOS9.0 or above wireless connection: wifi IEEE 802.11 b/g/n 2.4GHz Support third-party applications: Alexa special function: Voice control function Color: White shell material: ABS conductor material: Tin Phosphor Bronze	Product Size: 125*80*42.3mm Color box size: 138*104*60mm QTY: 50PCS/CTN MEANS: 53*29*31.5cm Gross Weight: 14KG










75	 <p>Zigbee smart wall socket (US-type)</p>	Zigbee-US15A	<p>Number of holes 2 digits          Number of jacks: 3 holes          Number of USB ports: 1          full length: wireless          switch mode: sub-control          Rated current: 15A          3C rated voltage range: Above 50V 440V and below          Product Series: American standard 2 plug + USB          Rated voltage: AC220V          Rated frequency: 60Hz          rated power: Single 1500W Total 2500W Inductive          load less than 2000W</p>		
76		WIFI-301-AP	<ul style="list-style-type: none"> <li>* Material: anti-fire ABS Material materials</li> <li>* Rated power: 30W Type-C input: 110-240V ~ 60Hz 15A 1875W;</li> <li>USB-C Output: 5V ~ 3A/9V ~ 3A/15V ~ 2A/20V ~ 1.5A;</li> <li>USB-A Output: 5V ~ 2.4A Max (2.4A Max Per Port);</li> <li>* Working current: 10A, AC220-240V 50Hz 2000W</li> <li>* Versatile protection on all outlets</li> </ul>		
77	 <p>Smart PD Power Strip</p>	Zigbee-301-AP	<ul style="list-style-type: none"> <li>* Compact design, lightweight and portable</li> <li>* Neatly arranged plug and ports</li> <li>* Includes built-in SFL power cord</li> <li>* 12 months Warranty and lifetime technical support</li> </ul>		

SPLKtech


Smart Curtain Motor/Motortrack

No.	Picture	Model	Features	Compatible devices
78	<p>Smart Curtain Motor Guide (WiFi / ZigBee控制)</p> <p>Private mold design</p>	GM46-114-Zigbee	Smart curtain kit with 1x Zigbee motor+1x 1.14 Meter track+ 1x one-way remote control Track dimension: 1x50CM, 2x20CM, 1x10CM, rotating box 14CM, extension piece 3CM	
79		GM46-114-WIFI	Smart curtain kit with 1x WiFi motor+1x 1.14 Meter track+ 1x one-way remote control Track dimension: 1x50CM, 2x20CM, 1x10CM, rotating box 14CM, extension piece 3CM	
80		GM46-214-Zigbee	Smart curtain kit with 1x Zigbee motor+1x 2.14 Meter track+ 1x one-way remote control Track dimension: 1x1M, 1x50CM, 2x20CM, 1x10CM, 1x rotating box 14CM, extension piece 3CM	
81		GM46-214-WIFI	Smart curtain kit with 1x WiFi motor+1x 2.14 Meter track+ 1x one-way remote control Track dimension: 1x1M, 1x50CM, 2x20CM, 1x10CM, 1x rotating box 14CM, extension piece 3CM	
82		GM46-314-Zigbee	Smart curtain kit with 1x Zigbee motor+1x 3.14 Meter track+ 1x one-way remote control 2x1M, 1x50CM, 2x20CM, 1x10CM, 1x rotating box 14CM, extension piece 3CM	
83		GM46-314-WIFI	Smart curtain kit with 1x WiFi motor+1x 3.14 Meter track+ 1x one-way remote control 2x1M, 1x50CM, 2x20CM, 1x10CM, 1x rotating box 14CM, extension piece 3CM	
84		GM46-414-Zigbee	Smart curtain kit with 1x Zigbee motor+1x 4.14 Meter track+ 1x one-way remote control 3x1M, 1x50CM, 2x20CM, 1x10CM, 1x rotating box 14CM, extension piece 3CM	
85		GM46-414-WIFI	Smart curtain kit with 1x WiFi motor+1x 4.14 Meter track+ 1x one-way remote control 3x1M, 1x50CM, 2x20CM, 1x10CM, 1x rotating box 14CM, extension piece 3CM	
86		GM46-514-Zigbee	Smart curtain kit with 1x Zigbee motor+1x 5.14 Meter track+ 1x one-way remote control 4x1M, 1x50CM, 2x20CM, 1x10CM, 1x rotating box 14CM, extension piece 3CM	
87		GM46-514-WIFI	Smart curtain kit with 1x WiFi motor+1x 5.14 Meter track+ 1x one-way remote control 4x1M, 1x50CM, 2x20CM, 1x10CM, 1x rotating box 14CM, extension piece 3CM	
88	GM46-614-Zigbee	Smart curtain kit with 1x Zigbee motor+1x 6.14 Meter track+ 1x one-way remote control 5x1M, 1x50CM, 2x20CM, 1x10CM, 1x rotating box 14CM, extension piece 3CM		
89	GM46-614-WIFI	Smart curtain kit with 1x WiFi motor+1x 6.14 Meter track+ 1x one-way remote control 5x1M, 1x50CM, 2x20CM, 1x10CM, 1x rotating box 14CM, extension piece 3CM		
90	<p>Smart curtain motor</p>	zigbee curtain motor ZIGBEE-DJ01	<ol style="list-style-type: none"> <li>1. Easy to control Curtain via mobile APP/ scene switch panel and echo</li> <li>2. Support manual sensing function</li> <li>3. High quality motor configuration</li> <li>4. Electronic Memory Limit Function</li> <li>5. Resistance and Stop Function</li> <li>6. Rated torque: 1.5Nm</li> <li>7. Rated speed: 120/rpm</li> <li>8. Curtain line retracting speed: 12cm/s</li> </ol>	
91		wifi curtain motor WIFI-DJ01		
92	<p>Smart Curtain Kit (retractable track)</p>	Zigbee-DJ02	<p>The Smart curtain kit include: ①zigbee Smart curtain motor ②retractable rail (2.45-4.5M) ③Remote controller* ④pcs</p> <p>Features:</p> <ol style="list-style-type: none"> <li>1. New ultra-quiet architecture design, truly silent operation</li> <li>2. Ultra-small size, large torque</li> <li>3. High-grade thickened piano paint process</li> <li>4. The second gear speed is adjustable</li> <li>5. Fabric canteen automatic repair</li> <li>6. DC wide voltage, no fear of current fluctuations</li> <li>7. Support hotel plug-in card power/dry contact/485 control mode</li> </ol> <p>①Torque: 1.2Nm ②Voltage: 100~240V ③Weight: 50KG ④Rated speed: 80-120 (rpm) ⑤Opening/closing speed (cm/s)</p>	
93		WIFI-DJ02		
94		zigbee curtain motor ZIGBEE-GM46	<p>Draging Start/Stop, Stop in case of obstruction, Electronic Limit, Speed Regulation, Stop Setting At Any Point, Intelligent Route Amending, Dry Contact control, AC contact Control, Match Code&amp;Reset Without Setting Button, Fabric Traction Identify, Fabric Rounding Identify, Overload Protection, Running Overtime Protection</p> <ol style="list-style-type: none"> <li>1) AC90V to 240V 50/60Hz</li> <li>2) Working environment: -5℃~45℃</li> <li>3) Rated power: 20W</li> <li>4) Rated torque: 2.0Nm</li> <li>5) Wireless transmission: Zigbee</li> <li>6) App application name: Tuya/Smartlife APP</li> </ol>	
95		wifi curtain motor WIFI-GM46		
96	<p>Curtain motor drive head for GM46</p>		<p>Curtain motor drive head for GM46 Curtain motor.</p> <p>Wholesale distributors can buy the motor track locally with collocation</p>	
97			<p>curtain remote control (Compatible with RF433 devices)</p>	
98	<p>curtain motor track GD02</p>		<ul style="list-style-type: none"> <li>*Material: aluminum alloy</li> <li>*Weight: 14KG or more (depend on its length)</li> <li>*Belt: 7pcs of 3X2 molybdenum wire</li> <li>*Boom: 304 stainless steel</li> <li>*Hanging wheel: 304 stainless steel</li> <li>*Material: aluminum alloy</li> <li>*Weight: 14KG or more (depend on its length)</li> <li>*Belt: 7pcs of 3X2 molybdenum wire</li> <li>*Boom: 304 stainless steel</li> </ul>	
















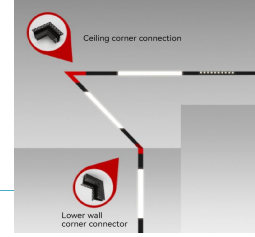


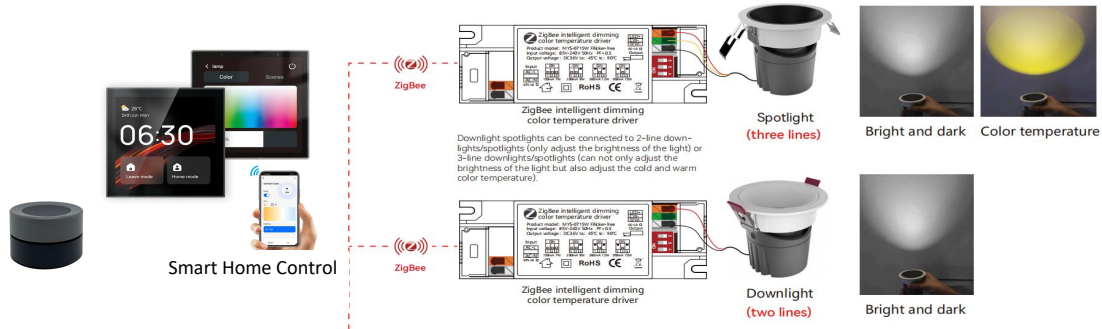99	 <p><b>Smart Shutter motor</b></p>	AM25-1.2/30	<p>25 ZIGBEE tubular motor Dc motor, built-in lithium battery Diameter: 25 mm Torque: 1.2 N RPM: 30</p> 		<p>Tips: Powered by a built-in 7.4V rechargeable battery.</p>
100	 <p><b>Smart Motorized Roller Blinds Drive Motor</b></p>	GS-LS-BLE (BLE version)			
101		GS-LS-WIFI (WIFI version)	<ol style="list-style-type: none"> <li>1.Timer your shedule via APP to set open or close time for roller shutters</li> <li>2.Compatible with a variety of shades,blinds,curtains.</li> <li>3.AC adapter is a must for normal use of the wifi blinds motor with no battery powered</li> <li>4.Support one mobile phone to control multiple devices or multiple mobile phone to control one device.</li> <li>5.RF remote control supported as another single control method</li> </ol>		
102	 <p><b>Smart Motorized Roller Blinds Drive Motor</b></p>	GS-LS-ZIG (ZIGBee version)			
103	 <p><b>(EU standard) WIFI smart curtain switch</b></p>	GS-WS-EU-C (EU standard)	<p>European/UK/GBWIFI touch curtain switch</p> <ol style="list-style-type: none"> <li>1. Mobile phone APP control</li> <li>2. Smart speaker voice control</li> <li>3. Automation scene linkage WIFI + RF433</li> </ol>		
104	 <p><b>US standard Wifi touch curtain switch</b></p>	GS-WS-US-C (USA standard)	<p>USA standard Wifi touch curtain switch</p> <ol style="list-style-type: none"> <li>1. Mobile phone APP control</li> <li>2. Smart speaker voice control</li> <li>3. Automation scene linkage WIFI + RF433</li> </ol>		

### Schematic Diagram of Downlight and Light Strip Dimming













No.	Picture	Model	Features		Compatible devices
105		3TD-5W/7W	① Lamp surface size: 68*H75mm ② hole size: 55mm ③ Light Angle: 15°24°36° ④ Angle adjustable: adjustable ⑤ Color temperature: 2700K-6500K		
106		3TD-7W	① Lamp surface size: 85*H83mm ② hole size: 75mm ③ Light Angle: 15°24°36° ④ Angle adjustable: adjustable ⑤ Color temperature: 2700K-6500K		
107		3TD-10W/12W	① Lamp surface size: 85*H83mm ② hole size: 75mm ③ Light Angle: 15°24°36° ④ Angle adjustable: adjustable ⑤ Color temperature: 2700K-6500K		
108		TD1-7W	① Lamp surface size: 85*H75mm ② hole size: 75mm (diameter) ③ Light Angle: 90°120° ④ Color temperature: 2700K-6500K ⑤ product color: white/Black		
109		TD1-10W/12W	① Lamp surface size: 102*H52mm ② hole size: 95mm (diameter) ③ Light Angle: 90°120° ④ Color temperature: 2700K-6500K ⑤ product color: white/Black		
110		TD1-15W	① Lamp surface size: 126*H66mm ② hole size: 120mm (diameter) ③ Light Angle: 90°120° ④ Color temperature: 2700K-6500K ⑤ product color: white/Black		
111		TD1-20W	① Lamp surface size: 126*H66mm ② hole size: 120mm (diameter) ③ Light Angle: 90°120° ④ Color temperature: 2700K-6500K ⑤ product color: white/Black		
112		MYS-0715W	It can control the down lamp and spot lamp cold light and warm light constant voltage dimming driver Power: Color Temperature adjustment 7W 9W 12W Input voltage :AC85-265V Output voltage :DC21V-36V Output current: 7W 150mA 9W 200mA 12W 260mA Size MM: 100*36*23		
113		FGD-10W	① Applicable track: Suitable for 20MM width track ② Product Name: Floodlight (Magnetic suction style) ③ Size: <b>L300*W22*H25</b> ④ Color temperature: 2700-6000K ⑤ Irritation angle: 120° ⑥ Input voltage: DC48V		
114		FGD-20W	① Applicable track: Suitable for 20MM width track ② Product Name: Floodlight (Magnetic suction style) ③ Size: <b>L600*W22*H25</b> ④ Color temperature: 2700-6000K ⑤ Irritation angle: 120° ⑥ Input voltage: DC48V		
115		FGD-40W-1.2M	① Applicable track: Suitable for 20MM width track ② Product Name: Floodlight (Magnetic suction style) ③ Size: <b>L900*W22*H25</b> ④ Color temperature: 2700-6000K ⑤ Irritation angle: 120° ⑥ Input voltage: DC48V		The track's length is 1.2M, 40W

116		CXSD-10W	ee2		
117	 ZigBee Spotlight (Magnetic suction style)	CXSD-15W	① Applicable track: Suitable for 20MM width track ② Product Name: Spotlight(Magneticsuction style) ③ Size:(dia. )45*L100mm ④ Color temperature: 2700-6000K ⑤ Irritation angle: 15°24'36" ⑥ Input voltage: DC48V		
118		GSD-6W	① Applicable track: Suitable for 20MM width track ② Product Name: Grille light (Magnetic suction style) ③ Size: <b>L110*W22*H25</b> ④ Color temperature: 2700-6000K ⑤ Irritation angle: 24°36' ⑥ Input voltage: DC48V		
119		GSD-12W	① Applicable track: Suitable for 20MM width track ② Product Name: Grille light (Magnetic suction style) ③ Size: <b>L220*W22*H25</b> ④ Color temperature: 2700-6000K ⑤ Irritation angle: 24°36' ⑥ Input voltage: DC48V		
120	 ZigBee grille lamp (Magnetic suction style)	GSD-18W	① Applicable track: Suitable for 20MM width track ② Product Name: Grille light (Magnetic suction style) ③ Size: <b>L328*W22*H25</b> ④ Color temperature: 2700-6000K ⑤ Irritation angle: 24°36' ⑥ Input voltage: DC48V		
121		ZDGSD-6W	① Applicable track: Suitable for 20MM width track ② Product Name: Grille light (Magnetic suction style) ③ Size: <b>L135*W22*H100</b> ④ Color temperature: 2700-6000K ⑤ Irritation angle: 24°36' ⑥ Input voltage: DC48V		
122		ZDGSD-12W	① Applicable track: Suitable for 20MM width track ② Product Name: Grille light (Magnetic suction style) ③ Size: <b>L230*W22*H100</b> ④ Color temperature: 2700-6000K ⑤ Irritation angle: 24°36' ⑥ Input voltage: DC48V		
123	 ZigBee Collapsiblegrill light (Magnetic suction style)	ZDGSD-18W	① Applicable track: Suitable for 20MM width track ② Product Name: Grille light (Magnetic suction style) ③ Size: <b>L370*W22*H100</b> ④ Color temperature: 2700-6000K ⑤ Irritation angle: 24°36' ⑥ Input voltage: DC48V		
124	 Magnetic suction lamp mounting track (hidden type)	AZGD-20MM-1.5 (thickness 1.5mm)	Installation mode: Slot 35mm Input voltage :DC48V Free splicing type, thickness 1.5mm, Four copper wire, The whole meter multiple sales, If choose white color plus \$0.5	 	The default is one meter, Maximu 2 meters/piece. Over 2 meters, we will suggest order multi-pieces.
125	 Magnetic suction lamp mounting track (hidden type)	AZGD-20MM-2.0 (thickness 2.0mm)	Installation mode: Slot 35mm Input voltage :DC48V Free splicing type, thickness 2.0mm, Four copper wire, The whole meter multiple sales, If choose white color plus \$0.5	 	The default is one meter, Maximu 2 meters/piece. Over 2 meters, we will suggest order multi-pieces.
126	 Magnetic suction lamp power supply	CXDY-100W	Power: 100W Output voltage: DC48V		
127	 Magnetic suction lamp power supply	CXDY-200W	Power: 200W Output voltage: DC48V		
128	 R20-1 negative Angle	R20-1-NA	Magnetic suction lamp track adapter		
129	 R20-1 plane L Angle	R20-1-PA			
130	 T-shaped corner	R21			T-shaped corner for Magnetic suction lamp track
131	 +-shaped corner	R23	+ -shaped corner for Magnetic suction lamp track		
132	 Connecting piece for corner	LJP	Connecting piece for Magnetic suction lamp track corner		





133	 1.5 meters of suspended wire	DX-1.5M	1.5 meters of suspended wire		suspended wire for chandelier or ceiling lamp
134	 load module	SRMK	load module for Magnetic suction lamp track		
135	 Pass through module	ZTMK	Pass through module for Magnetic suction lamp track		
136	 Angle module	ZJMK	Angle module for Magnetic suction lamp track		
137	 Smart Home Control		 ZigBee intelligent dimming color temperature driver	 Light strip (three lines)	 Bright and dark Color temperature
138	 <b>TOP SELLING</b> 4" touch smart voice control panel with built-in Alexa (WiFi+Zigbee + BLE)	T1E-TPP01-Z	<b>T1E is a Tuya smart central control panel integrated with Tuya smart home gateway + built-in Alexa voice control (English, Spanish, Arabic, German &amp; French) + super Zigbee device compatibility + group dimming system.</b>  <b>Main Features:</b> 1. A best alternative of tuya ZigBee gateway at home, 100+ Zigbee sub-devices can be added in. 2. 3 Control modes at different distance with 3 themes 3. Multimedia interconnection function. Add smart doorbell and smart camera, which will show the screen outside the door when someone rings the bell, contributing a higher level of security to the family. 4. Support group wireless dimming lighting. Works with zigbee dimming driver, can realize single light and group lights dimming.		 works with the Google Assistant works with amazon alexa
139	 two-color low voltage 24V high color rendering light strip (10 meters per roll)	24V-2835-192	Power: 20W, Color Temperature: 3000K-6000K, Voltage: DC24V  <b>Re:16W per meter</b>		
140	 RGB COB low voltage light strip (5 meters per roll)	GS-COB-RGB-5M			
141	 <b>TOP SELLING</b> Constant Voltage light strip driver (2 colors)	GS-DDQD	Input voltage :DC 5-24V Output current/Channel:6Amax Total Output Current: 15Amax Operating Temperature : -20 to +60°C Constant Voltage		
142		DDD-100W	Power:100W, Color Temperature:3000K-6000K, Voltage: DC24V		
143		DDY-150W	Power: 150W, Color Temperature: 3000K-6000K, Voltage: DC24V		
144		DDY-200W/300W	Power: 200W/300W, Color Temperature: 3000K-6000K, Voltage: DC24V		
145	 <b>NEW</b> RGBW/WW-5050-60D (5 meters)		RGB+3000K+6000K five-in-one, 24W/m, DC24V, three-year warranty. <b>10 meters per roll.</b>		

146			Rated power: 12V-120W/24V-240W Input voltaa: DC12-24V Output current: 10ADC Support RGBCW light strip		
147		DP01-9W	<ul style="list-style-type: none"> <li>* Support status tracking, home appliances status timely feedback to your device.</li> <li>* Support 16,000,000 colors adjust with your smart phone</li> <li>* Support Lum adjust with smart phone</li> <li>* Easy installation, easy handling and can be activated immediately and stably.</li> <li>* humidity: ≤80%</li> <li>* Wireless consuming: ≤0.3W</li> <li>* Encryption type :AES</li> </ul>		
148		GS-ZGA19	Tuya Zigbee 3.0 Power: 5W 850LM Size: 60*114mm Voltage 85-265V Working temp.: -25℃ to 45℃ Connector: E27, E26, B22 Ra:80 PF:0.5290 Needs to work with gateway, Support Amazon, Google, Xiaodu and other major smart speakers		MOQ: 100pcs to order
149		GS-ZGGU10	Tuya Zigbee 3.0 Power: 5W 450LM Size:45*57mm Voltage 85-265V Working temp.: -25℃ to 45℃ Connector: GU10 Support Amazon, Google, Xiaodu and other major smart speakers	Certificate: CE/FCC ID/Rohs	Single Size: 5*5*6cm Single weight: 44g Carton box: 100pcs/CTN Carton box Size: 27*27*28cm weight: 4.85KG
150		GS-SY-RD	GS-SY-RD is a multi-functional scene button ,which can trigger full on or full off mode with one button, and turn the knob to adjust the brightness of the light. Double click for away mode to turn off all your lights, air conditioners, fans and other electronic devices. working voltage:DC3V Receive sensitivity:98dBm Standby Consumption:0.8uA Life of battery:1 year(general use)		
151		GS-SY-SR	zigbee wireless button scene stickers Support dimming		
152		GS-TGKG	Knob Dimmer Switch <b>(for SCR dimming LED light)</b> 1.when the light is on, the user can touch the control panel adjust the brightness of the light, and the status indicator on the panel will change at the same time. 2.Touch Dimming: Move your finger up and down to adjust the light level 3.Set the mood with APP from anywhere 4.Exquisite craft and extraordinary protection Mechanism		
153		WIFI-1WAA	European/UK/GB Knob Dimmer Switch <b>(for SCR dimming LED light)</b> 1.Rotary Dimming Control: Rotate your finger left and right adjust the brightness 2. Compatible Bulbs: INC 300W / LED Dimmable 220W / CFL Dimmable 220W 3. 2.4G WIFI / Dimmer light / Multi-platform Support/ Mechanical Push On/Off button 4.Exquisite craft and extraordinary protection Mechanism		Single weight: 204g Product size: 10*10*6.3 FCL weight: 13.6kg FCL size: 42.5*34*33.5 60 packs
154		Zigbee-1WAA			<b>(Black color, MOQ100pcs)</b>

Smart Valve Controller/Gas Machine Hand/Gas Leakage Sensor

No.	Picture	Model	Features	Compatible devices
155	 WIFI Smart Garage Controller	GS-MS102	Smart Garage Controller :This product is suitable for dry contact motor controlled garage doors Input:AC100-240V 50/60HZ Output:NO Power:300W Electricity:16A	EASY INSTALLATION 
156	 Smart Valve Controller	WIFI-LZ	1) Valve pressure: 1.6MPA 2) Rated torque: 30-60kg.CM 3) Rated speed:7.6rpm 4) Scheduled time for start and stop.	
157		ZIG-LZ	5) Low noise. 6) Auto stop when blocked. 7) Support Amazon Echo voice control.	
158	 Smart Valve Controller	WIFI-QY-WH	1) Valve pressure: 1.6MPA 2) Rated torque: 30-60kg.CM 3) Rated speed:7.6rpm 4) Scheduled time for start and stop.	
159		ZIG-QY-WH	5) Low noise. 6) Auto stop when blocked. 7) Support Amazon Echo voice control.	
160	 Zigbee Smart Thermostatic Radiator Valve	GS-ZTRV-PJ-601	<b>Zigbee Smart Thermostatic Radiator Valve</b> - Accessible via your smartphone app, easy remote control after successful network configuration - Programmable device with customized exclusive temperature plan, up to 6events allowed to set each day - After no operation for more than 5 seconds, the device enters sleep mode, which can save energy and prolong battery life - Long press the Set Button for 3 seconds to switch the screen display direction.  Specifications Power supply: 3x1.5V alkaline AA batteries (not included) Protection degree: IP20 Ambient Temperature: 0-50 ℃ Surface temperature: 90℃ Max (at the radiator)	
161	 WIFI Smart Thermostatic Radiator Valve	GS-ZTRV-PJ-603	<b>WIFI Smart Thermostatic Radiator Valve</b> Automatic debugging function, suitable for all kinds of mainstream valves√ The device supports Wi-Fi fast distribution network, no additional gateways required Intelligent PID algorithm, efficient control of valve opening and closing,energy saving and environmental protectionThe motor adopts ultra-quiet technology to minimize noise pollutionThe device has activated the automatic conversion of summer time and wintertime, which can be activated or terminated as needed  Specifications Power supply: 3x1.5V alkaline AA batteries (not included) Protection degree: IP20 Ambient Temperature: 0-50 ℃ Surface temperature: 90℃ Max (at the radiator)	
162	<b>Tuya WIFI Zigbee circuit breaker and WIFI meter</b>			
163		WCB-SC-1P80-WIFI	WIFI circuit breaker 1P 10A-80A support SAAS	
164		WCB-SC-1P80-ZIG	Zigbee circuit breaker 1P 10A-80A support SAAS	
165		WCB-SC-1P100-WIFI	WIFI circuit breaker 1P 100A support SAAS	
166		WCB-SC-1P100-ZIG	Zigbee circuit breaker 1P 10A-80A support SAAS	
167		WCB-SC-2P80-WIFI	Wifi breaker 2P 10A-80A support SAAS	
168		WCB-SC-2P80-ZIG	Zigbee breaker 2P 10A-80A support SAAS	
169		WCB-SC-2P100-WIFI	WIFI circuit breaker 2P 100A support SAAS	
170		WCB-SC-2P100-ZIG	Zigbee circuit breaker 2P 100A support SAAS	
171		WCB-SC-1P100M-WIFI	Wifi circuit breaker 1P 10A-100A with power meter support SAAS	
172		WCB-SC-1P100M-ZIG	Zigbee circuit breaker 1P 10A-100A with power meter support SAAS	
173		WCB-SC-2P100M-WIFI	Wifi circuit breaker 2P 10A-100A with power meter support SAAS with electricity leakage protection function	
174		WCB-SC-2P100M-ZIG	Zigbee circuit breaker 2P 10A-100A with power meter support SAAS with electricity leakage protection function	







175		WCB-SC-3P80 -WIFI	Wifi circuit breaker 3P 10A-80A support SAAS
176		WCB-SC-3P80 -ZIG	Zigbee circuit breaker 3P 10A-80A support SAAS
177		WCB-SC-3P100 -WIFI	WiFi circuit breaker 3P 100A support SAAS
178		WCB-SC-3P100 -ZIG	Zigbee circuit breaker 3P 100A support SAAS
179			WCB-SC-4P80- WIFI
180		WCB-SC-4P80- ZIGBEE	Zigbee breaker 4P 10A-80A support SAAS
181			GS-WM wifi meter 5-60A

SPLKtech

No.	Model	Picture	MOQ	Version	Function	
182	Smart door lock F8-TY-WIFI WIFI Version		QTY: ≤50: ≤500	Hot sales	<ol style="list-style-type: none"> <li>Smart door lock with Zinc alloy material</li> <li>1 group of master code, 100 groups of fingerprint users</li> <li>Fingerprint scanning time &lt;math&gt;\le 0.1s&lt;/math&gt;</li> <li>Smart fingerprint recognition function: 360° fingerprint detection; from young to elder, a person only need to record his fingerprint one time, then he can unlock the door through his whole life.</li> <li>Appt phantom password technology, you can add some numbers before/after you input the real password, which can avoid other people peep your password.</li> <li>Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card,</li> </ol>	Remark: (Comes with lock body 24*240mm/30*240mm (optional), it can be deducted \$6.5 if you don't need the lock body.
183	F8-TY-ZIGBEE Zigbee Version		QTY: ≤50: ≤500	Hot sales		
184	Fingerprint+Video doorbell smart door lock H20-P		QTY: ≤50: ≤500	Hot sales	<ol style="list-style-type: none"> <li>When the guest rings the doorbell, the smart door lock will capture the photo of the guest and send it to the APP of the host's mobile phone, and the host's mobile phone will also receive a video popover to view the real-time situation of the door. If it is someone you know, you can directly unlock the door remotely on the phone.</li> <li>Every time the lock is opened, the mobile APP will receive push information</li> <li>Work with tuya mobile APP or smart life APP.</li> <li>Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card, mobile APP</li> </ol>	
185	3D Face recognize + Fingerprint cat eye+graffiti door lock		QTY: ≤50: ≤500	Hot sales	<ol style="list-style-type: none"> <li>Face Fingerprint cat eye+graffiti door lock, real materials reject plastic knobs plastic handles.</li> <li>Remote Unlock function, press the electronic doorbell to take a picture and upload it to the mobile phone.</li> <li>Semiconductor fingerprint recognition, instantly identify rejected clones.</li> <li>Magnepal sensing technology, ready all fingerprints, whether dry or wet solid wear-resistant protective coating, anti-static.</li> <li>Triple alarm function, isolates high frequency pulse interference, and will not cause accidental door opening.</li> <li>Low light imaging, Real bright enough clearly visible Outside: Creative fish eye imaging wider viewing angle range, built in fill light module has good imaging effect in low light environment.</li> <li>Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card, mobile APP, face</li> </ol>	Remark: This set does not match the standard lock body, users need to purchase the lock body by themselves.
186	Tuya WiFi Handle intelligent door lock		QTY: ≤50: ≤500		<p>WiFi smart door lock IC card, key, fingerprint, password, APP, Linking with other devices Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card,</p>	
187	Tuya Bluetooth Smart door lock		QTY: ≤50: ≤500		<ol style="list-style-type: none"> <li>Low Battery Powered by 4 pcs AAA batteries</li> <li>USB charging port available for running-out batteries</li> <li>Emergency mechanical key available for unlocking without interface</li> <li>Create one-time periodic and temporary password with effective and expiration time in smart life APP or tuya APP</li> </ol>	
188	Smart door lock with bluetooth function (APP: TT lock)		QTY: ≤50: ≤500		<p>Unlocking method: fingerprint/password/IC card/mechanical key/TT lock APP Functions: Low power voice prompt, anti-picking alarm, password contact error 5 times alarm, virtual password alarm, check the unlock history record function Extended function: TT lock APP, TT lock hotel, hotel PMS Battery: 1.5V (AA alkaline battery) *4pcs Fingerprint module: semiconductor living fingerprint head Fingerprint identification speed: &lt;math&gt;\le 1s&lt;/math&gt; Rejection rate &lt;math&gt;\le 0.01\%&lt;/math&gt; power consumption: &lt;math&gt;\le 0.04A&lt;/math&gt; Emergency power supply: Micro USB Size: 370*70*25MM (If you don't need fingerprint module, then it will subtract USD2/pcs)</p>	Remark: (Comes with lock body 24*240mm/30*240mm (optional), it can be deducted \$6.5 if you don't need the lock body.
189	Card Reader/Encoder (works with TT lock)		QTY: ≤50: ≤500		<p>Support reading card Hotel style hair clips should be used with hotel locks. Support master card, floor card, building card, room card production. Dimensions : 70x70x26mm RF frequency : 13.56Mhz Case material: Plastic Supported card type : MiFareS50 Power supply mode : USB Power port: Type-C USB</p>	
190	Smart door lock HF6 WIFI Version		QTY: ≤50: ≤500	Tuya wifi version	<ol style="list-style-type: none"> <li>Smart door lock with Zinc alloy material</li> <li>9 group of master code, 291 groups of fingerprint users</li> <li>Fingerprint scanning time &lt;math&gt;\le 0.1s&lt;/math&gt;</li> <li>Smart fingerprint recognition function: 360° fingerprint detection; from young to elder, a person only need to record his fingerprint one time, then he can unlock the door through his whole life.</li> <li>Appt phantom password technology, you can add some numbers before/after you input the real password, which can avoid other people peep your password.</li> <li>Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card,</li> </ol>	Remark: (Comes with lock body 24*240mm/30*240mm (optional), it can be deducted \$6.5 if you don't need the lock body.
191	TDF1 WIFI cat eye version semi-automatic lock		QTY: ≤50: ≤500	Tuya wifi version	<ol style="list-style-type: none"> <li>When the guest rings the doorbell, the smart door lock will capture the photo of the guest and send it to the APP of the host's mobile phone, and the host's mobile phone will also receive a video popover to view the real-time situation of the door. If it is someone you know, you can directly unlock the door remotely on the phone.</li> <li>Every time the lock is opened, the mobile APP will receive push information</li> <li>Work with tuya mobile APP or smart life APP.</li> <li>Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card, mobile APP</li> </ol>	Remark: (Comes with lock body 24*240mm/30*240mm (optional), it can be deducted \$6.5 if you don't need the lock body.

192	<p>M1 WIFI cat eye version semi-automatic lock</p>	<p>golden/black</p>	<p>QTY: ≤50: ≤500</p>	Tuya wifi version	<ol style="list-style-type: none"> <li>When the guest rings the doorbell, the smart door lock will capture the photo of the guest and send it to the APP of the host's mobile phone, and the host's mobile phone will also receive A video popover to view the real-time situation of the door. If it is someone you know, you can directly unlock the door remotely on the phone.</li> <li>Every time the lock is opened, the mobile APP will receive push information</li> <li>work with tuya mobile APP or smart life APP.</li> <li>Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card,mobile APP</li> </ol>	<p>Remark: (Comes with lock body 24*240mm/30*240mm (optional), it can be deducted \$6.5 if you don't need the lock body</p>
193	<p>E908 WIFI cat eye version semi-automatic lock</p>	<p>black/star gray</p>	<p>QTY: ≤50: ≤500</p>	Tuya wifi version	<ol style="list-style-type: none"> <li>When the guest rings the doorbell, the smart door lock will capture the photo of the guest and send it to the APP of the host's mobile phone, and the host's mobile phone will also receive A video popover to view the real-time situation of the door. If it is someone you know, you can directly unlock the door remotely on the phone.</li> <li>Every time the lock is opened, the mobile APP will receive push information</li> <li>work with tuya mobile APP or smart life APP.</li> <li>Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card,mobile APP</li> </ol>	<p>Remark: (Comes with lock body 24*240mm/30*240mm (optional), it can be deducted \$6.5 if you don't need the lock body</p>
194	<p>TV8 3D face cat eye version automatic lock</p>	<p>star gray/black</p>	<p>QTY: ≤50: ≤500</p>	Tuya wifi version	<ol style="list-style-type: none"> <li>When the guest rings the doorbell, the smart door lock will capture the photo of the guest and send it to the APP of the host's mobile phone, and the host's mobile phone will also receive A video popover to view the real-time situation of the door. If it is someone you know, you can directly unlock the door remotely on the phone.</li> <li>Every time the lock is opened, the mobile APP will receive push information</li> <li>work with tuya mobile APP or smart life APP.</li> <li>Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card,mobile APP</li> </ol>	<p>Remark: (Comes with lock body 24*240mm/30*240mm (optional), it can be deducted \$6.5 if you don't need the lock body</p>
195	<p>DF3 cat eye version automatic lock</p>	<p>black</p>	<p>QTY: ≤50: ≤500</p>	Tuya wifi version	<ol style="list-style-type: none"> <li>When the guest rings the doorbell, the smart door lock will capture the photo of the guest and send it to the APP of the host's mobile phone, and the host's mobile phone will also receive A video popover to view the real-time situation of the door. If it is someone you know, you can directly unlock the door remotely on the phone.</li> <li>Every time the lock is opened, the mobile APP will receive push information</li> <li>work with tuya mobile APP or smart life APP.</li> <li>Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card,mobile APP</li> </ol>	<p>Remark: (Comes with lock body 24*240mm/30*240mm (optional), it can be deducted \$6.5 if you don't need the lock body</p>
196	<p>DF3-3D-P 3D face version automatic lock</p>	<p>black</p>	<p>QTY: ≤50: ≤500</p>	Tuya wifi version	<ol style="list-style-type: none"> <li>When the guest rings the doorbell, the smart door lock will capture the photo of the guest and send it to the APP of the host's mobile phone, and the host's mobile phone will also receive A video popover to view the real-time situation of the door. If it is someone you know, you can directly unlock the door remotely on the phone.</li> <li>Every time the lock is opened, the mobile APP will receive push information</li> <li>work with tuya mobile APP or smart life APP.</li> <li>Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card,mobile APP</li> </ol>	<p>Remark: (Comes with lock body 24*240mm/30*240mm (optional), it can be deducted \$6.5 if you don't need the lock body</p>
197	<p>HF8 3D face version automatic lock</p>	<p>black</p>	<p>QTY: ≤50: ≤500</p>	Tuya wifi version	<ol style="list-style-type: none"> <li>When the guest rings the doorbell, the smart door lock will capture the photo of the guest and send it to the APP of the host's mobile phone, and the host's mobile phone will also receive A video popover to view the real-time situation of the door. If it is someone you know, you can directly unlock the door remotely on the phone.</li> <li>Every time the lock is opened, the mobile APP will receive push information</li> <li>work with tuya mobile APP or smart life APP.</li> <li>Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card,mobile APP</li> </ol>	<p>Remark: (Comes with lock body 22*160mm, it can be deducted \$2 if you don't need the lock body</p>
198	<p>Smart door lock A210-TY WIFI Version</p>	<p>grey/black</p>	<p>QTY: ≤50: ≤500</p>	Tuya zigbee version	<ol style="list-style-type: none"> <li>When the guest rings the doorbell, the smart door lock will capture the photo of the guest and send it to the APP of the host's mobile phone, and the host's mobile phone will also receive A video popover to view the real-time situation of the door. If it is someone you know, you can directly unlock the door remotely on the phone.</li> <li>Every time the lock is opened, the mobile APP will receive push information</li> <li>work with tuya mobile APP or smart life APP.</li> <li>Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card,mobile APP</li> </ol>	<p>Remark: (Comes with lock body 3585)</p>
199	<p>TDD2 3D face version automatic lock</p>	<p>black</p>	<p>QTY: ≤50: ≤500</p>	Tuya wifi version	<ol style="list-style-type: none"> <li>When the guest rings the doorbell, the smart door lock will capture the photo of the guest and send it to the APP of the host's mobile phone, and the host's mobile phone will also receive A video popover to view the real-time situation of the door. If it is someone you know, you can directly unlock the door remotely on the phone.</li> <li>Every time the lock is opened, the mobile APP will receive push information</li> <li>work with tuya mobile APP or smart life APP.</li> <li>Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card,mobile APP</li> </ol>	<p>Remark: (Comes with lock body 3585)</p>

### Intelligent Sweeping Robot

No.	Picture	Model	Features		Package List
200	 <p>Intelligent Sweeping Robot</p>	C3	Material: ABS+glass cover Working voltage: 14.8V Battery capacity: 2600mAh Dust box capacity: 600ML Electric control water tank capacity: 350ML A cleaning time: 60-100min	Product net weight: 3KG Product size: 330x330x79mm Package gross weight: 3.5KG Packing size: 585 * 385 * 126mm	Body*1, side brush*4 (two with two), filter*2 (one with one), mop*2 (one with one), recharger*1, adapter*1, water tank assembly* 1 (optional) manual*1
201	 <p>Intelligent Sweeping Robot</p>	C2	Material: ABS Working voltage: 14.8V Battery capacity: 2600mAh Dust box capacity: 600mL Electric control water tank capacity: 350mL A cleaning time: 150min	Product net weight: 3KG Product size: 330x330x79mm Package gross weight: 3.5KG	Body*1, side brush*4 (two with two), remote control*1, AA battery*2, filter*2 (one with one), mop*2 (one with one), recharging stand* 1, Adapter*1, Manual*1
202	 <p>Intelligent Sweeping Robot</p>	C1	Material: ABS Working voltage: 14.8V Battery capacity: 2000mAh Dust box capacity: 400ML A cleaning time: 60-90min	Product net weight: 2.5KG Product size: 305x305x75mm Gross packaging weight: 3KG	Body*1, remote control*1, AAA battery*2, side brush*4 (two with two), adapter*1, recharge stand*1, filter*1, brush*1 (optional) , manual*1
203	 <p>Intelligent Sweeping Robot</p>	C01	Material: ABS Working voltage: 7.4v Battery capacity: 2000mAh Dust box capacity: 200ML A cleaning time: 60-90min	Product net weight: 2.5KG Product size: 305x305x75mm Gross packaging weight: 3KG	Body*1, Side Brush*2, Hair Brush*1, Hypa*1, Manual*1, USB Cable

**Smart Thermostats**


Item	Model	Product Image	Description	Remark	Packing Info.
204	GS-ME102 WIFI GS-ME102 WIFI Electric Floor Heating/Water Floor Heating/Gas Furnace		<ol style="list-style-type: none"> <li>1. Temperature sensor: NTC</li> <li>2. Temperature accuracy: ±1°C</li> <li>3. Self-consumption power: &lt; 2W</li> <li>4. Power supply voltage: AC220V, 50/60Hz</li> <li>5. Load current: 16A/3A</li> <li>6. Temperature setting: 5-95°C</li> <li>7. Multi-screen display on color screen, nine language settings, Celsius/Fahrenheit setting, black/white mirror border, 5+2, 6+1, 7+0 programming mode, power-off memory, child lock</li> </ol>	Bluetooth WIFI model (Mobile APP remote control, voice assistant Amazon, Google, Xiaodu, Yandex)	ME102 Inner Box Package Size: 95*100*65mm 16A Gross weight: 0.4KG 3A Gross weight: 0.35KG 54Pcs/CTN Carton size: 423*403*290mm
205	GS-ME80 WIFI Electric Floor Heating/Water Floor Heating		<ol style="list-style-type: none"> <li>1. Temperature sensor: NTC</li> <li>2. Temperature accuracy: ±1°C</li> <li>3. Self-consumption power: &lt; 2W</li> <li>4. Power supply voltage: AC 85-275V 50/60Hz</li> <li>5. Load current: 16A/3A</li> <li>6. Temperature setting: 5-95°C</li> <li>7. Multi-screen display on color screen, six-language setting, Celsius/Fahrenheit setting, black screen/white screen, horizontal screen/vertical screen, 5+2, 6+1, 7+0 programming mode, power-off memory, PM2.5, Humidity, outdoor temperature, weather forecast display, child lock</li> </ol>	Bluetooth WIFI model (Mobile APP remote control, voice assistant Amazon, Google, Xiaodu, Yandex)	ME80 Package Size: 142*95*65MM 16A Gross weight: 0.43KG 3A Gross weight: 0.35KG Carton size: 423*403*290mm 48Pcs/CTN
206	GS-ME160 WIFI Electric Floor Heating/Water Floor Heating/Gas Stove		<ol style="list-style-type: none"> <li>1. Temperature sensor: NTC</li> <li>2. Temperature accuracy: ±1°C</li> <li>3. Self-consumption power: &lt; 2W</li> <li>4. Power supply voltage: AC 85-275V 50/60Hz</li> <li>5. Load current: 16A/3A</li> <li>6. Temperature setting: 5-95°C</li> <li>7. Multi-screen display on color screen, six language settings, Celsius/Fahrenheit setting, black screen/white screen, 5+2, 6+1, 7+0 programming mode, power-off memory, PM2.5, humidity, outdoor temperature, weather forecast display, child lock</li> </ol>	Bluetooth WIFI model (Mobile APP remote control, voice assistant Amazon, Google, Xiaodu, Yandex)	ME160 Inner Box Package Size: 95*100*65mm 16A Gross weight: 0.43KG 3A Gross weight: 0.35KG 64Pcs/CTN Carton size: 423*403*290mm
207	GS-ME80C WIFI Electric Floor Heating/Water Floor Heating		<ol style="list-style-type: none"> <li>1. Temperature sensor: NTC</li> <li>2. Temperature accuracy: ±1°C</li> <li>3. Self-consumption power: &lt; 1W</li> <li>4. Power supply voltage: AC220V, 50/60Hz</li> <li>5. Load current: 16A/3A</li> <li>6. Temperature setting: 5-95°C</li> <li>7. Touch button, 5+2 week programming, power off memory, Celsius/Fahrenheit setting, child lock</li> </ol>	Bluetooth WIFI model (Mobile APP remote control, voice assistant Amazon, Google, Xiaodu, Yandex)	ME80C Package Size: 142*95*65MM 16A Gross weight: 0.43KG 3A Gross weight: 0.35KG Carton size: 423*403*290mm 48Pcs/CTN
208	GS-ME80C WIFI Electric Floor Heating/Water Floor Heating		<ol style="list-style-type: none"> <li>1. Temperature sensor: NTC</li> <li>2. Temperature accuracy: ±1°C</li> <li>3. Self-consumption power: &lt; 1W</li> <li>4. Power supply voltage: AC220V, 50/60Hz</li> <li>5. Load current: 16A/3A</li> <li>6. Temperature setting: 5-95°C</li> <li>7. Touch button, 5+2 week programming, power off memory, Celsius/Fahrenheit setting, child lock</li> </ol>	Without WIFI	ME80C Package Size: 142*95*65MM 16A Gross weight: 0.43KG 3A Gross weight: 0.35KG Carton size: 423*403*290mm 48Pcs/CTN
209	GS-ME81 WIFI Electric Floor Heating/Water Floor Heating/Gas Stove		<ol style="list-style-type: none"> <li>1. Temperature sensor: NTC</li> <li>2. Temperature accuracy: ±1°C</li> <li>3. Self-consumption power: &lt; 1W</li> <li>4. Power supply voltage: AC220V, 50/60Hz</li> <li>5. Load current: 16A/3A</li> <li>6. Temperature setting: 5-90°C</li> <li>7. Touch button, 5+2 week programming, power-off memory, with mirror, two backlight display specifications: white orange key, white white key, child lock</li> </ol>	Bluetooth WIFI model (Mobile APP remote control, voice assistant Amazon, Google, Xiaodu, Yandex)	ME81 Inner Box Package Size: 95*100*65mm 16A Gross weight: 0.3KG 3A Gross weight: 0.2KG 84Pcs/CTN Carton size: 423*403*290mm
210	GS-ME81 WIFI Electric Floor Heating/Water Floor Heating/Gas Stove		<ol style="list-style-type: none"> <li>1. Temperature sensor: NTC</li> <li>2. Temperature accuracy: ±1°C</li> <li>3. Self-consumption power: &lt; 1W</li> <li>4. Power supply voltage: AC220V, 50/60Hz</li> <li>5. Load current: 16A/3A</li> <li>6. Temperature setting: 5-90°C</li> <li>7. Touch button, 5+2 week programming, power-off memory, with mirror, two backlight display specifications: white orange key, white white key, child lock</li> </ol>	Without WIFI	ME81 Inner Box Package Size: 95*100*65mm 16A Gross weight: 0.3KG 3A Gross weight: 0.2KG 84Pcs/CTN Carton size: 423*403*290mm
211	GS-ME82A WIFI Electric Floor Heating/Water Floor Heating/Gas Stove		<ol style="list-style-type: none"> <li>1. Temperature sensor: NTC</li> <li>2. Temperature accuracy: ±1°C</li> <li>3. Self-consumption power: &lt; 1W</li> <li>4. Power supply voltage: AC220V, 50/60Hz</li> <li>5. Load current: 16A/3A</li> <li>6. Temperature setting: 5-95°C</li> <li>7. Touch button, 5+2 week programming, power off memory, Celsius/Fahrenheit setting, child lock</li> </ol>	Bluetooth WIFI model (Mobile APP remote control, voice assistant Amazon, Google, Xiaodu, Yandex)	ME82 Inner Box Package Size: 95*100*65mm 16A Gross weight: 319g 3A Gross weight: 250g 64Pcs/CTN Carton size: 423*403*290mm
212	GS-ME82A WIFI Electric Floor Heating/Water Floor Heating/Gas Stove		<ol style="list-style-type: none"> <li>1. Temperature sensor: NTC</li> <li>2. Temperature accuracy: ±1°C</li> <li>3. Self-consumption power: &lt; 1W</li> <li>4. Power supply voltage: AC220V, 50/60Hz</li> <li>5. Load current: 16A/3A</li> <li>6. Temperature setting: 5-95°C</li> <li>7. Touch button, 5+2 week programming, power off memory, Celsius/Fahrenheit setting, child lock</li> </ol>	Without WIFI	ME82 Inner Box Package Size: 95*100*65mm 16A Gross weight: 319g 3A Gross weight: 250g 64Pcs/CTN Carton size: 423*403*290mm
213	GS-ME82B WIFI Electric Floor Heating/Water Floor Heating/Gas Stove		<ol style="list-style-type: none"> <li>1. Temperature sensor: NTC</li> <li>2. Temperature accuracy: ±1°C</li> <li>3. Self-consumption power: &lt; 1W</li> <li>4. Power supply voltage: AC220V, 50/60Hz</li> <li>5. Load current: 16A/3A</li> <li>6. Temperature setting: 5-95°C</li> <li>7. Touch the button, 5+2 weeks of programming, power-off memory, Celsius/Fahrenheit setting, one-key energy saving, backlight adjustment, child lock</li> </ol>	Bluetooth WIFI model (Mobile APP remote control, voice assistant Amazon, Google, Xiaodu, Yandex)	ME82B Inner Box Package Size: 95*100*65mm 16A Gross weight: 319g 3A Gross weight: 250g 64Pcs/CTN Carton size: 423*403*290mm
214	GS-ME82B WIFI Electric Floor Heating/Water Floor Heating/Gas Stove		<ol style="list-style-type: none"> <li>1. Temperature sensor: NTC</li> <li>2. Temperature accuracy: ±1°C</li> <li>3. Self-consumption power: &lt; 1W</li> <li>4. Power supply voltage: AC220V, 50/60Hz</li> <li>5. Load current: 16A/3A</li> <li>6. Temperature setting: 5-95°C</li> <li>7. Touch the button, 5+2 weeks of programming, power-off memory, Celsius/Fahrenheit setting, one-key energy saving, backlight adjustment, child lock</li> </ol>	Without WIFI	ME82B Inner Box Package Size: 95*100*65mm 16A Gross weight: 319g 3A Gross weight: 250g 64Pcs/CTN Carton size: 423*403*290mm
215	GS-ME82C WIFI Electric Floor Heating/Water Floor Heating/Gas Stove		<ol style="list-style-type: none"> <li>1. Temperature sensor: NTC</li> <li>2. Temperature accuracy: ±0.5°C</li> <li>3. Self-consumption power: &lt; 1W</li> <li>4. Power supply voltage: AC230V, 50/60Hz</li> <li>5. Load current: 16A/3A</li> <li>6. Temperature setting: 5-95°C</li> <li>7. Touch button, 5+2 weeks of programming, power-off memory, backlight adjustment setting (mobile APP can adjust the backlight); with mirror, one-key energy-saving function, child lock</li> </ol>	Bluetooth WIFI model (Mobile APP remote control, voice assistant Amazon, Google, Xiaodu, Yandex)	ME82C Inner Box Package Size: 95*100*65mm 16A Gross weight: 319g 3A Gross weight: 250g 64Pcs/CTN Carton size: 423*403*290mm
216	GS-ME82C WIFI Electric Floor Heating/Water Floor Heating/Gas Stove		<ol style="list-style-type: none"> <li>1. Temperature sensor: NTC</li> <li>2. Temperature accuracy: ±0.5°C</li> <li>3. Self-consumption power: &lt; 1W</li> <li>4. Power supply voltage: AC230V, 50/60Hz</li> <li>5. Load current: 16A/3A</li> <li>6. Temperature setting: 5-95°C</li> <li>7. Touch button, 5+2 weeks of programming, power-off memory, backlight adjustment setting (mobile APP can adjust the backlight); with mirror, one-key energy-saving function, child lock</li> </ol>	Without WIFI	ME82C Inner Box Package Size: 95*100*65mm 16A Gross weight: 319g 3A Gross weight: 250g 64Pcs/CTN Carton size: 423*403*290mm
217	GS-ME83 WIFI Electric Floor Heating/Water Floor Heating/Gas Stove		<ol style="list-style-type: none"> <li>1. Temperature sensor: NTC</li> <li>2. Temperature accuracy: ±1°C</li> <li>3. Self-consumption power: &lt; 1W</li> <li>4. Power supply voltage: AC220V, 50/60Hz</li> <li>5. Load current: 16A/3A</li> <li>6. Temperature setting: 5-90°C</li> <li>7. Touch the button, 5+2 weeks of programming, power off memory, white display, child lock</li> </ol>	Bluetooth WIFI model (Mobile APP remote control, voice assistant Amazon, Google, Xiaodu, Yandex)	ME83 Inner Box Package Size: 95*100*65mm 16A Gross weight: 0.3KG 3A Gross weight: 0.2KG 64Pcs/CTN Carton size: 423*403*290mm
218	GS-ME83 WIFI Electric Floor Heating/Water Floor Heating/Gas Stove		<ol style="list-style-type: none"> <li>1. Temperature sensor: NTC</li> <li>2. Temperature accuracy: ±1°C</li> <li>3. Self-consumption power: &lt; 1W</li> <li>4. Power supply voltage: AC220V, 50/60Hz</li> <li>5. Load current: 16A/3A</li> <li>6. Temperature setting: 5-90°C</li> <li>7. Touch the button, 5+2 weeks of programming, power off memory, white display, child lock</li> </ol>	Without WIFI	ME83 Inner Box Package Size: 95*100*65mm 16A Gross weight: 0.3KG 3A Gross weight: 0.2KG 64Pcs/CTN Carton size: 423*403*290mm
219	GS-ME167 Radiator valve Zigbee		<ol style="list-style-type: none"> <li>1. Power supply mode: two AA batteries</li> <li>2. Temperature sensor: NTC</li> <li>3. Temperature accuracy: ±1°C</li> <li>4. Temperature setting: 5-60°C</li> <li>5. Communication protocol: GZB</li> <li>6. Power on/off function/window opening function/anti-scale function/child lock function/antifreeze function/alarm prompt/low battery reminder function/proportional integral function</li> <li>7. Mobile APP control, compatible with Alexa, Amazon Echo, Google Home, Yandex and Xiaodu</li> </ol>	Bluetooth WIFI model (Mobile APP remote control, voice assistant Amazon, Google, Xiaodu, Yandex)	Gross weight: 217g Inner Box Size: 100*88*61mm Carton size: 423*403*290mm 64Pcs/CTN
220	GS-ME901 (Wireless Floor Heating/Gas Stove/wall mounted boiler)		<ol style="list-style-type: none"> <li>1. Temperature accuracy: ±1°C</li> <li>2. Self-consumption power: &lt; 1W</li> <li>3. Power supply mode of the launch panel: two AAA batteries, USB (Type-c 5p DCSV)</li> <li>4. Receiving power supply voltage: AC220V 50/60Hz</li> <li>5. Load current: 3A</li> <li>6. Temperature setting: 5-90°C</li> <li>7. Touch the button, 5+2 weeks of programming, wireless frequency 433MHz (two-way FSK), child lock</li> </ol>	Bluetooth WIFI model (Mobile APP remote control, voice assistant Amazon, Google, Xiaodu, Yandex)	ME901 Inner Box Package Size: 142*95*65mm 3A Gross weight: 0.4KG Carton size: 423*403*290mm 48Pcs/CTN
221	GS-ME901 (Wireless Floor Heating/Gas Stove/wall mounted boiler)		<ol style="list-style-type: none"> <li>1. Temperature accuracy: ±1°C</li> <li>2. Self-consumption power: &lt; 1W</li> <li>3. Power supply mode of the launch panel: two AAA batteries, USB (Type-c 5p DCSV)</li> <li>4. Receiving power supply voltage: AC220V 50/60Hz</li> <li>5. Load current: 3A</li> <li>6. Temperature setting: 5-90°C</li> <li>7. Touch the button, 5+2 weeks of programming, wireless frequency 433MHz (two-way FSK), child lock</li> </ol>	Without WIFI	ME901 Inner Box Package Size: 142*95*65mm 3A Gross weight: 0.4KG Carton size: 423*403*290mm 48Pcs/CTN
222	GS-ME98 Wireless Floor Heating/Gas Stove/wall mounted boiler		<ol style="list-style-type: none"> <li>1. Temperature accuracy: ±0.5°C</li> <li>2. Self-consumption power: &lt; 1W</li> <li>3. Transmitter panel power supply method: two AA batteries (WIFI function cannot be used), USB (Type-c 5p DCSV)</li> <li>4. Receiving power supply voltage: AC230V 50/60Hz</li> <li>5. Load current: 3A</li> <li>6. Temperature setting: 5-90°C</li> <li>7. Touch button, 5+2 week programming, wireless frequency 433MHz (two-way FSK), energy-saving mode, child lock, 节能模式 儿童锁</li> </ol>	Bluetooth WIFI model (Mobile APP remote control, voice assistant Amazon, Google, Xiaodu, Yandex)	ME98 Package Size: 136*96*79MM Gross weight: 0.4KG Carton size: 423*403*290mm 40Pcs/CTN
223	GS-ME98 Wireless Floor Heating/Gas Stove/wall mounted boiler		<ol style="list-style-type: none"> <li>1. Temperature accuracy: ±0.5°C</li> <li>2. Self-consumption power: &lt; 1W</li> <li>3. Transmitter panel power supply method: two AA batteries (WIFI function cannot be used), USB (Type-c 5p DCSV)</li> <li>4. Receiving power supply voltage: AC230V 50/60Hz</li> <li>5. Load current: 3A</li> <li>6. Temperature setting: 5-90°C</li> <li>7. Touch button, 5+2 week programming, wireless frequency 433MHz (two-way FSK), energy-saving mode, child lock, 节能模式 儿童锁</li> </ol>	Without WIFI	ME98 Package Size: 136*96*79MM Gross weight: 0.4KG Carton size: 423*403*290mm 40Pcs/CTN
224	GS-ME2FWH0-WIFI Integrated air conditioning and floor heating 2 in 1		<ol style="list-style-type: none"> <li>1. Power supply: 85-250VAC 50/60Hz</li> <li>2. Maximum load current: 3A/250VAC</li> <li>3. Temperature display accuracy: ±0.5°C</li> <li>4. Room temperature control range: 5-70°C</li> <li>5. Standby backlight brightness selection</li> <li>6. Fan coil operation selection</li> <li>7. Power-off memory selection</li> <li>8. Valve anti-lock selection</li> </ol>	Bluetooth WIFI model (Mobile APP remote control, voice assistant Amazon, Google, Xiaodu, Yandex)	
225	GS-ME2FWH0-WIFI Integrated air conditioning and floor heating 2 in 1		<ol style="list-style-type: none"> <li>1. Power supply: 85-250VAC 50/60Hz</li> <li>2. Maximum load current: 3A/250VAC</li> <li>3. Temperature display accuracy: ±0.5°C</li> <li>4. Room temperature control range: 5-70°C</li> <li>5. Standby backlight brightness selection</li> <li>6. Fan coil operation selection</li> <li>7. Power-off memory selection</li> <li>8. Valve anti-lock selection</li> </ol>	Without WIFI	

### Security Camera & Video Door Bells

No.	Picture	Model	Features
226	 Tuya wireless WiFi Camera	T53A	TUYA Wireless WiFi IP camera CPU: GK7102 Memory: 64MB DDR2 SDRAM Display resolution: 2M pixels, 1920*1080p Sensor Chip: GC2033 Lens: 3.6mm f2.2 horizontal field angle 85.5 degrees Rotation angle of pan tilt: 360 degrees horizontally and 80 degrees vertically 1)Day night conversion mode:ICR infrared filter 2)TF local storage:32GB whole day recording time reference value:standard definition(360p)=20 days 3)Number of users:3"
227	 Outdoor Floodlight IP camera	426-3M-TY	Unique Point Floodlight Camera APP TUYA IP Grade IP65 outdoor use IR leds 6pcs IR leds+ 6pcs white lights Lens 3.6mm Alexa With Alexa google home , more usd 2.5 PC Support PC computer view Storage TF Card (MAX 128GB )& Amazon cloud Plug standard no plug(option , more usd 1.5)
228		426-5M-TY	
229	 WiFi outdoor PTZ Camera	425-3M-TY	Unique Point 1 inch Mini PTZ Camera APP TUYA -IP Grade IP65 outdoor use -IR leds 6pcs IR leds -Lens 3.6mm
230		425-5M-TY	-Alexa With Alexa google home , more usd 2.5 -PC Support PC computer view -Storage TF Card (MAX 128GB )& Amazon cloud -Plug standard no plug(option ,
231	 Smart Video door phone	GS-P2	2.4G wifi/ 1080P HD/ Motion Alarm/ Real time Video/ 166° Wide Angle/ 2-Way Audio/ Night Vision/ Stay Tuned Set the low battery alarm threshold in Smart life APP Real-time battery monitor for your smart door bell to ensure a better experiences When the visitor push the doorbell button,you will get a call, You can see and hear the visitor in your APP
232	 WiFi Video doorbell	GS-SDB-1 (WIFI VERSION)	1. Main control: Ingicn T312L Sensor:SC233A 2. Mobile detection :PIR detection + humanoid filtering + regional setting, effective distance of 8 meters 3. Night vision mode :850mm infrared 4. Night vision distance: effective lighting distance is about 8 meters 5. Lens: HD lens 3MM F=2.0 FOV 160 degrees 6. Battery :18650*2 lithium battery, solar rechargeable battery 7. Charging: support USB interface full charging about 4 hours 8. Memory: supports up to 128GB TF card and cloud storage 9. Supports full-duplex intercom 10. Waterproof grade :IP66 11. Support access to Google Assistant and Amazon Alexa
233	 WiFi Video doorbell	GS-SDB-1 (WIFI VERSION)	1. Main control: Ingicn T312L Sensor:SC233A 2. Mobile detection :PIR detection + humanoid filtering + regional setting, effective distance of 8 meters 3. Night vision mode :850mm infrared 4. Night vision distance: effective lighting distance is about 8 meters 5. Lens: HD lens 3MM F=2.0 FOV 160 degrees 6. Battery :18650*2 lithium battery, solar rechargeable battery 7. Charging: support USB interface full charging about 4 hours 8. Memory: supports up to 128GB TF card and cloud storage 9. Supports full-duplex intercom 10. Waterproof grade :IP66 11. Support access to Google Assistant and Amazon Alexa
234	 Tuya WiFi Video doorbell	SC060-WCB2	Sensor:CMOS Function: Two-way Audio, Built-in Mic, NIGHT VISION Video Compression Format: H.264 Data Storage Options: SD Card Customized support: Customized logo, OEM, ODM Power supply: DC 5V1A Battery: 5000mAh Battery duration: 4~6 months (10 times a day) App name: Tuya smart/smart life Night vision mode / distance: IR-CUT automatically switch / 5m



Tuya Smart Security Alarm System				
Picture	Features	Model		Packages
<p><b>TOP SELLING</b></p> <p><b>Tuya Smart Alarm system</b></p>	<p><b>WiFi+2G touch screen smart intelligent alarm system</b></p> <p>2.4 inch TFT display screen, concise user interface and menu hint design. Main interface status bar, date/clock indication, fairly obvious alarm host status. Built-in powerful performance CPU master based on 32-bit Cortex-M3 core. Based on ucos-III operating system with multitasking design, great user operation experience.</p> <p>WiFi/GSM/3G intranet alarm system, support different alarm channels like APP push/SMS/voice monitoring/intranet center etc. to ensure the alarm performance stable and reliable.</p> <ul style="list-style-type: none"> <li>* support SMS arm/disarm and voice arm/disarm</li> <li>* Support up to 100 learning/storage location for remote control, RFID cards and wireless detector.</li> <li>* Support many defense zones, such as gate, sos, bedroom, window, balcony, perimeter, smoke, gas, carbon monoxide, water leaking, etc.</li> <li>* Support the main power malfunction, backup power shortage, tamper alarm and other extended alarm.</li> <li>* Support entry/exit zone, indoor zone, perimeter zone, 24-hour zone, etc.</li> <li>* Up to 5 groups preset alarm phone numbers, SMS on/off and dial on/off can be set respectively.</li> <li>* Can store and inquire daily operation records and alarm records.</li> <li>* Support multi-language menu display, voice prompts and alarm SMS setting. Can record 20 seconds voice message and alarm voice.</li> <li>* Telephone function, support 5 groups re-dial number.</li> </ul>	GS-103 (WiFi&2G)		<p>works with the Google Assistant</p> <p>works with amazon alexa</p> <p>Alarm host x1 Micro USB 5V/1000mA Power adapter x1. Wireless PIR detector x1 Door sensor x1 Remote control x2 RFID card x2. Wired siren x1</p>
		GS-103 (WiFi&4G-EU version)	<p>Input voltage: DC5V(micro uSB jack). Working current: &lt;120mA Standby current: &lt;80uA - Siren output: &lt;500mA - Wireless frequency: 315MHz/433MHz/868MHz Wireless coding: EV 1527 2Gbands: 850/900/1800/1900MHz - wi-Fi standard: IEEE802.11b/g/n wireless standard. Back up battery: 3.7V/1000mAh lithium battery. Working temperature: -10~55C Relative humidity: &lt;80%RH(No freezing)- Product dimension: 185x125x14.7MM (LxHxT)</p>	
		GS-103 (WiFi&4G-US version)		
		GS-103-2G-L (WiFi&2G)		
		GS-103-4G-EU-L (WiFi&4G-EU version)		
GS-103-4GUS-L GS-103 (WiFi&4G-US version)				
<p><b>TOP SELLING</b></p> <p><b>4.3" Touch Screen Smart Alarm System</b></p>	<ul style="list-style-type: none"> <li>* Simple and intuitive operation with 4.3" TFT full color touch screen with computer interface showing live status, date and time</li> <li>* 4G (only in 4G version)/ GSM(2G)+WiFi alarm system, supports multiple alarm notification channels, like APP push/SMS/voice phone call</li> <li>* 90 wireless zones for accessories including sensors, remote controls and 10 zones for RFID tags</li> <li>* Support SMS arm/disarm and parameters setting, support voice arm/disarm.</li> <li>* Zone name editable</li> <li>* Support accessory low battery, AC power failure, hub or accessory battery power shortage, tamper alarm and other extended alarm.</li> <li>* Door/window unclosed notification while armed.</li> <li>* Support in/out zone, indoor zone, outdoor zone, 24 hours zone, doorbell and other zone settings.</li> <li>* Support 5 groups alarm phone number setting</li> <li>* External wired alarm connectors: 1 channel external wireless siren, 1 channel alarm linked wireless remote socket.</li> <li>* APP or hub can control electrical appliances by smart sockets (with same RF frequency).</li> <li>* Timed arm/disarm function.</li> <li>* Support operation logs and alarm events storage and tracing</li> <li>* Time synchronization function through GSM/WiFi network.</li> <li>* Support multi language menu, voice operation notice and SMS alarm settings</li> <li>* Support 20 seconds message and voice alarm.</li> <li>* support Amazon Alexa and google home</li> </ul>	GS107-2G (Standard kit)	<p>works with the Google Assistant</p> <p>works with amazon alexa</p>	
		GS107-4G (EU) (Standard kit)		
		GS107-4G (US) (Standard kit)		
<p><b>TOP SELLING</b></p> <p><b>2.4" Touch Screen Alarm system with touch screen &amp; RFID function</b></p>	<ul style="list-style-type: none"> <li>* Simple and intuitive operation with 2.4" TFT color screen showing live status, date and time, touch keypad and SOS button</li> <li>* Built-in powerful CPU based on 32-bit Cortex-M3 core with multi-task operation function</li> <li>* 4G (only in 4G version)/ GSM(2G)+WiFi alarm system, supports multiple alarm notification channels, like APP push/ SMS/ voice phone call...</li> <li>* 90 wireless zones for accessories including sensors, remote controls and 10 zones for RFID tags</li> <li>* With 3 hardwired zone (EoLR)</li> <li>* Support SMS arm/disarm and parameters setting, support voice arm/disarm.</li> <li>* Zone name editable</li> <li>* Support accessory low battery, AC power failure, hub or accessory battery power shortage, tamper alarm and other extended alarm.</li> <li>* Door/window unclosed notification while armed.</li> <li>* Support in/out zone, indoor zone, outdoor zone, 24 hours zone, doorbell and other zone settings.</li> <li>* Support 5 groups alarm phone number setting</li> <li>* External wired alarm connectors: 1 channel external wireless siren, 1 channel alarm linked wireless remote socket.</li> <li>* APP or hub can control electrical appliances by smart sockets.</li> <li>* Timed arm/disarm function.</li> </ul>	GS105-2G	<p>works with the Google Assistant</p> <p>works with amazon alexa</p> <p>1 wireless PIR detector, 1 wireless door sensor, 1 wired siren, 2 remote controls, 2 RFID, 1 power adapter</p>	
		GS105-4G (EU)		
		GS105-4G (US)		
<p><b>TOP SELLING</b></p> <p><b>WiFi+2G/4G Alarm System</b></p>	<ul style="list-style-type: none"> <li>* Simple and intuitive operation with 4.3" TFT full color touch screen with computer interface showing live status, date and time</li> <li>* Built-in powerful CPU based on 32-bit Cortex-M3 core with multi-task operation function</li> <li>* 4G (only in 4G version)/ GSM(2G)+WiFi alarm system, supports multiple alarm notification channels, like APP push/SMS/voice phone call...</li> <li>* 90 wireless zones for accessories including sensors, remote controls and 10 zones for RFID tags</li> <li>* Support SMS arm/disarm and parameters setting, support voice arm/disarm.</li> <li>* Zone name editable</li> <li>* Support accessory low battery, AC power failure, hub or accessory battery power shortage, tamper alarm and other extended alarm.</li> <li>* Door/window unclosed notification while armed.</li> <li>* Support in/out zone, indoor zone, outdoor zone, 24 hours zone, doorbell and other zone settings.</li> <li>* Support 5 groups alarm phone number setting</li> <li>* External wired alarm connectors: 1 channel external wireless siren, 1 channel alarm linked wireless remote socket.</li> <li>* APP or hub can control electrical appliances by smart sockets (with same RF frequency).</li> <li>* Timed arm/disarm function.</li> <li>* Support operation logs and alarm events storage and tracing</li> <li>* Time synchronization function through GSM/WiFi network.</li> <li>* Support multi language menu, voice operation notice and SMS alarm settings</li> <li>* Support 20 seconds message and voice alarm.</li> <li>* support Amazon Alexa and google home</li> </ul>	GS-106-2G	<p>works with the Google Assistant</p> <p>works with amazon alexa</p> <p>1 wireless PIR detector, 1 wireless door sensor, 1 wired siren, 2 RFID, 1 power adapter</p>	
		GS-106-4G (EU)		
		GS-106-4G (US)		

 <p>WiFi alarm system</p>	<ul style="list-style-type: none"> <li>* Wi-Fi alarm system, supports multiple alarm notification channels, like APP push/ voice phone call, etc.</li> <li>* Support APP remote arm/disarm, parameter setting and accessory management.</li> <li>* Based on uCOS - III operation system with multi-task function</li> <li>* WiFi online to obtain equipment latest working status, auto alarm when offline.</li> <li>* Built-in powerful CPU master based on 32-bit Cortex-M3 core.</li> <li>* Support the AC power failure, backup power shortage, tamper alarm and other extended alarm.</li> <li>* Support APP remote arm / disarm/recording/take picture/monitoring.</li> <li>* Support main brands cameras linking alarm, remote recording, monitoring,checking.</li> </ul>	<p>GS150 WiFi alarm system</p>	<p>Power input: DC 5V (micro USB standard interface power supply) Working current: &lt;120mA Wireless frequency: 433MHz Wireless coding: EV 1527 Wi-Fi: IEEE802.11 b/g/n RF standard Standby battery: 3.7V/800mAh lithium-ion Temperature range: 0°C~+55°C Humidity range: &lt; 80%RH (No freezing)</p>	 <p>1 wireless PIR detector, 1 wireless door sensor, 2 remote controls, 1 wireless siren 1 power adapter</p>
 <p>WiFi gas alarm</p>	<ol style="list-style-type: none"> <li>1. Self test function</li> <li>2. Motorola IC control, Reliable without false alarming</li> <li>3. Field audio and visible alarming</li> <li>4. Simple installation</li> <li>5. Excellent reliability &amp; high stability</li> <li>6. Low battery alarm</li> <li>7. Durable sensor head</li> <li>8. Less affected by other organic solvent</li> <li>9. Operating temperature:-0°C ~+50°C</li> <li>9. Humidity range: &lt; 80%RH (no freezing)</li> <li>10. Alarm output: Relay output (relay contact load 3A 250V AC / 3A 30V DC)</li> </ol>	<p>GS210W</p>	<ol style="list-style-type: none"> <li>1. Working voltage: DC 5V (micro USB)</li> <li>2. Alarm current: &lt;120mA</li> <li>3. Response time: &lt;30s</li> <li>4. Sensor lifetime: 3 years</li> <li>5. Installation method: wall mounting</li> <li>6. Air pressure: 86~106Kpa</li> <li>7. 2Gbands: 850/900/1800/1900MHZ</li> </ol>	<p>with stand</p>
 <p>WiFi smoke alarm</p>	<ol style="list-style-type: none"> <li>1. High sensitivity smoke detection.</li> <li>2. Built-in thermistor sensor, high temperature alarm function</li> <li>3. Smart WIFI remotely push alarm information.</li> <li>4. Smart APP control.</li> <li>5. With manually test, manually mute.</li> <li>6. Sound and light alarm.</li> </ol>	<p>GS443W</p>	<ol style="list-style-type: none"> <li>1. Working voltage: DC 9V alkaline battery</li> <li>2. Static current ≤ 10uA</li> <li>3. Alarm current: ≤ 100mA</li> <li>4. Alarm sound: &gt;80db</li> <li>5. Operating temperature:-0°C ~+50°C</li> <li>6. Humidity range: &lt; 95%RH (no freezing)</li> <li>7. Low voltage alert: 3.9V±0.3V</li> </ol>	<p>with stand</p>
 <p>WiFi Door/Window alarm</p>	<ol style="list-style-type: none"> <li>1. support tuya smart APP</li> <li>2. support google home &amp; amazon alexa</li> <li>3. door open alert, app notification</li> <li>4. real time monitoring for in &amp; out at the quarantine places.</li> <li>5. App remote monitoring, multi-level prevention and control</li> <li>6. 24 hours monitoring, solve the problem for fatigue on duty</li> <li>6. installation distance: &lt;2cm</li> <li>7. trigger range: 2-3cm</li> <li>5. Operating temperature:-0°C ~+50°C</li> </ol>	<p>D41</p>	<ol style="list-style-type: none"> <li>1. Working voltage: 3V (2*AA battery)</li> <li>2. Working current ≤ 19-59mA</li> <li>3. standby current: ≤ 35uA</li> <li>4. connect method: wifi (802.11b/g/n)</li> <li>5. wifi range: 30m</li> </ol>	<p>with stand</p>
<p>Accessories that can work with GS105,GS106,GS107,GS150</p>				
 <p>Remote controller</p>	<ol style="list-style-type: none"> <li>1. High stability: imported SMD components with SMT, surface acoustic resonator stabilization (SAW),6.5G UHF triode</li> <li>2. Black and white color for choice</li> <li>3. 4 remote controller buttons</li> <li>4. 433mHZ,1527 CODE</li> </ol>	<p>GS-RMC09</p>		<p>with stand</p>
 <p>wireless PIR motion sensor</p>	<ol style="list-style-type: none"> <li>1. Adopt the latest technology, the latest program algorithm microprocessor</li> <li>2. Ultra-low power consumption, longer battery life</li> <li>3. Built-in million code</li> <li>4. Wireless transmission of data signals</li> <li>5. Low voltage alarm function</li> <li>6. All-round automatic temperature compensation</li> <li>7. Intelligent logic analysis to prevent false positives</li> <li>8. Anti-white light, anti-strong light, anti-strong wind, high temperature</li> <li>9. Anti-high frequency interference</li> </ol>	<p>GS-86R</p>	<p>⊙ Working voltage: 9V 6F22 battery ⊙ Transmission frequency: 433MHZ ⊙ Coding method: EV1527 ⊙ Transmission distance: ≥120M ⊙ Detection angle: wide angle 110°/curtain 15° ⊙ Detection distance: 12M/8M (wide angle /curtain)</p>	
 <p>Curtain/Motion PIR motion sensor</p>	<ol style="list-style-type: none"> <li>1. Using a low-power microprocessor</li> <li>2. Ultra-low power consumption, longer battery life</li> <li>3. Built-in million code</li> <li>4. Wireless transmission of data signals</li> <li>5. Low voltage alarm function</li> <li>6. All-round automatic temperature compensation</li> <li>7. Intelligent logic analysis to prevent false positives</li> <li>8. Anti-white light</li> <li>9. Anti-high frequency interference</li> </ol>	<p>GS-92RM curtain PIR motion sensor</p> <p>GS-92R Wireless PIR motion sensor</p>	<p>⊙ Working voltage: 3V, two large Capacity alkaline batteries ⊙ Transmission frequency: 433MHZ ⊙ Coding method: EV1527 ⊙ Transmission distance: ≥120M : 12M/8M (wide angle/curtain)</p>	
 <p>Wireless door/window contact</p>	<p>Tiny appearance</p> <ul style="list-style-type: none"> <li>* Door/window contact sensor</li> <li>* Low power consumption, long battery life</li> <li>* Low battery report</li> <li>* 1527/2262 IC, oscillation resistance optional</li> <li>* Open/close reports</li> <li>* Tamper switch</li> <li>* RF433MHz</li> </ul>	<p>GS-D30</p>	<p>Tiny appearance</p> <ul style="list-style-type: none"> <li>* Door/window contact sensor</li> <li>* Low power consumption, long battery life</li> <li>* Low battery report</li> <li>* 1527/2262 IC, oscillation resistance optional</li> <li>* Open/close reports</li> <li>* Tamper switch</li> </ul>	
 <p>GS-67-R</p>	<p>This product is a multi-functional wireless intelligent door magnet. Emergency button and door magnetic dual-function integrated, using ultra-low power consumption chip design, low voltage fault monitoring report, anti-demolition, anti-damage function.</p> <ul style="list-style-type: none"> <li>* RF433MHz</li> </ul>	<p>GS-67-R</p>	<p>⊙ Working voltage: 3V button lithium battery ⊙ Transmission frequency: 433MHZ ⊙ Encoding method: EV1527 ⊙ Launch distance: ≥120M</p>	
 <p>GS-441R</p>	<p>When the alarm detects a certain concentration of smoke around, the alarm will send sound and light alarm and wireless transmission to the alarm host, (APP and NB models can also be customized) 3V10-year lithium battery,</p>	<p>GS-441R</p>	<p>Rated power supply: DC9V (9V alkaline battery) Static current: 15uA Monitoring current: 80uA</p>	
 <p>Wireless strobe siren</p>	<ol style="list-style-type: none"> <li>1. Work as a standalone alarm host or wireless siren.</li> <li>2. 20 wireless defense zones.</li> <li>3. At most 5 wireless remote controllers.</li> <li>4. Alarm with both voice prompts and quick flash strobe.</li> <li>5. Wireless learning code: adding new accessories, convenient , safe and efficient</li> <li>6. One-key-control function: Remote control to Arm/emergency alarm/disarm</li> <li>7. Built-in rechargeable Lithium battery</li> <li>8. Smart screw&amp;mount base.</li> </ol>	<p>GS-519R</p>	<ol style="list-style-type: none"> <li>1. Power output: DC12V 500mA</li> <li>2. Standby current: ≤13mA</li> <li>3. Alarm current: ≤230mA</li> <li>4. Frequency: 433MHz/315MHz</li> <li>5. Code: SC 2262 IC / 4.7MΩ</li> <li>6. Temperature: -20°C ~ +55°C</li> <li>7. Humidity: 40% ~ 80%RH</li> <li>8. Backup Battery: Lithium-ion battery 7.4V/400mA</li> </ol>	

	<ul style="list-style-type: none"> <li>⊙ Working voltage range: AC220V</li> <li>⊙ Power consumption: static ≤100 mA alarm ≤150 mA</li> <li>⊙ Alarm range: natural gas 3%-15% LEL</li> <li>⊙ Response time: &lt; 30 seconds</li> <li>⊙ Alarm sound: &gt; 75 db (1m away from the front)</li> <li>⊙ Gas sensitive element: life of three years</li> </ul>	GS-209-R	<ul style="list-style-type: none"> <li>⊙ Alarm sound: &gt; 75 db (1m away from the front)</li> <li>⊙ Gas sensitive element: life of three years</li> </ul>		
	<ul style="list-style-type: none"> <li>⊙ 20 wireless defense zones (number of wired non-defense zones)</li> <li>⊙ The alarm can be connected to up to 5 remote controls</li> <li>⊙ The alarm can be wired sound and light alarm, or wireless sound and light alarm</li> <li>⊙ The alarm has a tamper-proof alarm function</li> <li>⊙ The alarm has both a sound prompt and a quick flash prompt when it alarms</li> <li>⊙ Wireless learning to code: adding new accessories is convenient, fast, safe and efficient</li> <li>⊙ Built-in AAA NI-HM rechargeable battery pack, power failure alarm function</li> </ul>	SS02B	<ul style="list-style-type: none"> <li>⊙ One-button control: remote control to go out to arm, remote control to arm at home, remote control emergency alarm, remote control to quickly disarm</li> </ul>		
	<ul style="list-style-type: none"> <li>⊙ 20 wireless defense zones (number of wired non-defense zones)</li> <li>⊙ The alarm can be connected to up to 5 remote controls</li> <li>⊙ The alarm can be wired sound and light alarm, or wireless sound and light alarm</li> <li>⊙ The alarm has a tamper-proof alarm function</li> <li>⊙ The alarm has both a sound prompt and a quick flash prompt when it alarms</li> <li>⊙ Wireless learning to code: adding new accessories is convenient, fast, safe and efficient</li> <li>⊙ Built-in AAA NI-HM rechargeable battery pack, power failure alarm function</li> </ul>	GS-520	<ul style="list-style-type: none"> <li>⊙ One-button control: remote control to go out to arm, remote control to arm at home, remote control emergency alarm, remote control to quickly disarm</li> </ul>		
	<p>The wireless the doorbell used the advanced wireless access technology, and the bell button can wireless doorbell the master to code, receiving high sensitivity, distance, the wireless signal is stable, the large capacity high quality speech processing technology can accommodate 36 music, beautiful sounds, adjustable volume 8, exquisite appearance design fashion, contracted and compact, easy to install, plug and play.</p>	GS-16			
	<ul style="list-style-type: none"> <li>•Triggered by water from water sensor.</li> <li>•with dry battery model:23A .</li> <li>•Working frequency: 433.92 MHz±2KHZ or 315 MHz</li> <li>•Widely for bathroom and any place where needs to protect water leakage</li> </ul>	LSTC02			
	<ul style="list-style-type: none"> <li>•Power supply: 9V 6F22 (normal dry batter) .</li> <li>•Working current: 12 MA Static &lt; 50μA</li> <li>•Wireless frequency:433MHz</li> <li>•Detection range :360 degrees, Detection distance :5M</li> <li>•Sensor spacing :3s-60s</li> </ul>	GS-CWMS01			
	<ul style="list-style-type: none"> <li>•Working Voltage: DC 12V</li> <li>•Operating Current: 150mA-180mA</li> <li>•Transmitting Frequency: 315MHz or 433.92MHz( Customized is optional)</li> <li>•Receiving time: 3-10 s (Not receiving signal when it transmitted) Oscillation resistance: 1.5M-4.7M</li> <li>•Transmitting distance: 3000 m</li> <li>•Widely used in encode IC: 2262,2264,2260,1527,2240... etc.</li> </ul>	GS-XHZZO			with AC power adapter and gift box
	<p>Used to Away arm/Home Arm/Disarm the system,and also with doorbell button.</p> <ul style="list-style-type: none"> <li>•Work power: three AAA batteries</li> <li>•Standby current:≤30uA</li> <li>•Emission current:≤20mA</li> <li>•Tag quantity that keypad support: 5pcs</li> <li>•Wireless frequency: 433Mhz</li> </ul>	GS-K07			with 2pcs RFID keyfob and gift box
	<ul style="list-style-type: none"> <li>•Operating voltage:DC 9V battery (6F22 carbon battery, DC TYPE</li> <li>•Static current: ≤20uA</li> <li>•Alarm current: ≤40mA</li> <li>•Battery life: carbon battery for about 1 year.</li> <li>•Alarm indication: LED flashes in Red</li> <li>•Alarm sound : ≥ 85dB/3M</li> <li>•Radio frequency: 315MHz or 433MHz</li> </ul>	GS-WSD02			
	<ul style="list-style-type: none"> <li>•with external antenna</li> <li>•Power Requirements : DC12V</li> <li>•Current Consumption: 8-12mA communication</li> <li>•Transmit Frequency:315±0.2Mhz/433±0.2Mhz</li> <li>•Transmit Duration:less than 1s</li> <li>•Operating distance from central controller:less than 80m (no obstacle)</li> <li>•Dimension(LWH):85X37X16mm</li> </ul>	GS-WEB01			
	<ul style="list-style-type: none"> <li>•Power input : 9-15 VDC;</li> <li>•Detect distance: 12m×12m;</li> <li>•Fully sealed design, two-layer waterproof, macromolecule film plating</li> <li>•Remarkable pet-immunity function to prevent pets under 25kg;</li> <li>•Special lens anti UV to reduce false alarm at maximum</li> <li>•Germany importedoptical filter to block motley light up to 99%.</li> </ul>	GS-ODPIR03			with stand a